

ez-Distributor




12 x 3G SDI and 2 x HDMI OUT

Distribution Amplifier with Audio embedder /De-embedder



Easy **LCD Monitoring and Audio Level** in 2.7 inch TFT LCD. The LCD screen and the audio bar are extra features to facilitate monitoring of the video in 1 RU size.

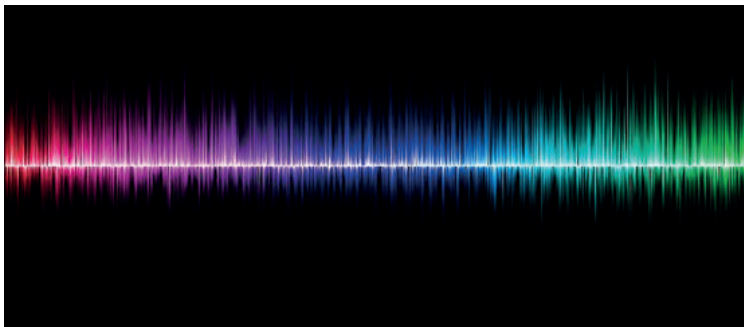

Audio **Embed & De-Embed**

If you wish to add an **external audio** to the video which is being distributed, don't worry. ez-Distributor, has a pair of XLR port for you to input a different audio. You can also take the sound out of the video.



ez-Distributor

Specifications



① LCD Display

- Input video display (SDI or HDMI)
- Audio Level Meter Display
- Input Video Resolution Display

② Menu buttons setting

- Video input
- Audio input
- Audio gain
- S/W version

③ AC Power On/Off switch



③ AC POWER

④ Analog Audio In

⑤ Analog Audio Out

⑥ HDMI IN ⑧ SDI IN

⑦ USB2.0

⑨ HDMI OUT

⑩ SDI OUT

- ③ **AC Power** : AC Power (100 -240V, 50/60Hz)
- ④ **ANALOG AUDIO IN** : XLR(Female) x 2
- ⑤ **ANALOG AUDIO OUT** : XLR(Male) x 2
- ⑥ **HDMI IN** : SD/HD/3G (HDMI Type A) x 1
- ⑦ **USB2.0** : Update (Micro USB Type)
- ⑧ **SDI IN** : SD/HD/3G-SDI (BNC 750hm) x 12
- ⑨ **HDMI OUT** : SD/HD/3G (HDMI Type A) x 2
- ⑩ **SDI OUT** : SD/HD/3G-SDI (BNC 750hm) x 12

ez-Distributor

System Specifications

Data Input

SDI Video Input: SD/HD/3G-SDI (BNC 75Ω) x1
HDMI Video Input: SD/HD/3G (HDMI Type A) x1

Video Formats

- 720x480i@59.94/60
- 720x576i@50
- 1280x720p@50/59.94/60
- 1920x1080i@50/59.94/60
- 1920x1080p@23.94/24/25/29.97/30
- 1920x1080p@50/59.94/60

Audio Input

XLR (Female) x2

Data Output

SDI Video Output: SD/HD/3G-SDI (BNC 75Ω) x12
HDMI Video Output: SD/HD/3G (HDMI Type A) x2

Video Formats

- 720x480i@59.94/60
- 720x576i@50
- 1280x720p@50/59.94/60
- 1920x1080i@50/59.94/60
- 1920x1080p@23.94/24/25/29.97/30
- 1920x1080p@50/59.94/60

Audio Output

XLR (Male) x2

Connections

Update : Debug (Micro-USB)x1

Display

2.7 inch TFT LCD : Input Video Display(SDI or HDMI), AUDIO Level Meter Display, Input Video Resolution Display

Electrical

Power Input: 100~240VAC @ 50/60Hz
Power Consumption: 10W(max.)
Operation Temperature: 0~45

Physical

Dimension: 44(H) X 478(W) X 226(D)
Weight: 3 kg