

WEIVER 2.0 Player – HD Radio Vector Signal Generator



WEIVER 2.0 Player – HD Radio Vector Signal Generator

Revision Number: 1.2
Distribution Date: Mar, 2025

Copy Rights

Copyright © 2006~2025 LUMANTEK Co., Ltd. All Rights Reserved

This document contains information that is proprietary to LUMANTEK.CO., LTD. The information in this document is believed to be accurate and reliable; however, LUMANTEK assumes no responsibility or liability for any errors or inaccuracies that may appear in this document, nor for any infringements of patents or other rights to third parties resulting from its use.

This publication may contain technical issues, inaccurate information or typos. These will be revised in revised edition, if there is any. No part of this publication is subject to be reproduced, stored in retrieval system, or transmitted in any forms, or any means without the prior consent by Lumantek.

HD Radio technology manufactured under license from iBiquity Digital Corporation. U.S. and Foreign Patents. HD Radio™ and the HD and HD Radio logos are proprietary trademarks of iBiquity Digital Corp. iBiquity Digital software © 2004-2025 iBiquity Digital Corporation. All Right Reserved.

Trademarks

HD ENCODULATOR™, SD ENCODULATOR™ LUMANTEK Logo, Mega Cruiser™, ORIX™, X-Cruiser™, DTA-Plus™, Media Blaster™, are Trademarks of Lumantek. Co., Ltd.

Any other trademarks than stated above in this document belongs to its pertinent corporation.

Warranty Period

Lumantek's products comes with One(1) year limited warranty. Please contact below if you need more information. .

LUMANTEK CUSTOMER SERVICES

sales@lumantek.co.kr / TEL:02-6947-7400 / FAX:02-6947-7440

Contents

1. Introduction -----	2
1.1 Introduction & Features	4
1.2 User System Requirement	5
1.3 Control Configuration(Recommended)	6
1.4 System Specification	7
1.5 WEIVER 2.0 Player Components-1	8
1.6 WEIVER 2.0 Player Components-2	9
1.7 Installation precautions	10
2. HD Radio -----	11
2.1 HD Radio Vector Signal generator – Version Info	11
2.2 Vector File List	12
2.3 HD Radio Operation	17
*** LCD Screen Operation	18
2.4 HD Radio UI	23
2.5 HD Radio Screen Capture	24
2.6 HD Radio Setting	27
3. API for WEIVER/WEIVERPlayer -----	28
3.1 Principle of WEIVER/WEIVERPlayer API	29
3.2 Data Packet Structure	30
3.3 Command	36
3.4 Example	44

WEIVER 2.0 Player – HD Radio Vector Signal Generator

1.1 Introduction & Features

WEIVER 2.0 Player plays back the real world RF signals which had either recorded with WEIEVR - RF capture and playback platform or other RF capture equipments. Also, it comes with a converting utility that converts the I/Q data file into a possible data format, .wpj, with WEIVER 2.0 Player. It's all for to re-generate real world RF environments that are too complex To exact simulate. It records signals directly to external SSD, and plays back directly from external SSD, so you can carry the “hassle-free heavy RF data copy” on your own.

FEATURES

- HD Radio Vector File Signal Generation (HD Radio AM/FM, Total 176 Files)
- Supports all universal DTV and ATV broadcasting include Broadcasting Radio protocols
- Playback of real world broadcasting signals recorded with WEIEVR R & P platform to regenerate real world conditions that are too complex to simulate
- Front-access hot swappable SSD for fast reading and writing speed
- e-SATA interface for external storages
- Support for Real-time Spectrum and GPS location with Signal Tracer

WEIVER-RF capture and playback system can plays back RF signals covering the bandwidth range from 8M to 56M, or ARB in almost any environment, such as in laboratories or during on-site testing. You can see the all information about WEIVER-RF capture and playback equipment from LUMANTEK's web site (<http://www.lumantek.com/>)

[Weiver HD Radio Version Information]

WeiverPlayer: 2.2.0.4 or above / DSP: 4.6.1.0(HW 1.6) or above

Weiver HD Radio: 1.0.0.0 or above



1.2 User System Requirements

Your PC(System) must meet the following specification.

Computer / Processor

- Intel Pentium 4 2.33GHz
- Athlon 64 2800 or the faster processor

Operating System

- Windows XP 32 bit service pack(sp2)
- Windows Vista 32 bit service pack(sp2)
- Windows Vista 64 bit service pack(sp2)
- Windows 7 32bit
- Windows 7 64bit

Memory - 2GB RAM

Hard Disk Space

- 512 GB SSD available hard disk space

Screen

- 1024x768,“32-bit True Color” -DirectX 9.0c or higher

Graphics Card

- DirectX 9.0c supported


Network

- 10/100 Mbps network card, 10/100/1000Mbps network card(Recommend)
- 802.11 b/g Wireless network card

External SSD Hard disk (Optional)

- Size : 512 GB / 1TB -TRIM :Yes
- Write Speed : 220 MB / Sec(Max.) -Read Speed : 250MB / Sec(Max.)

1.3 Control Configuration(Recommended)

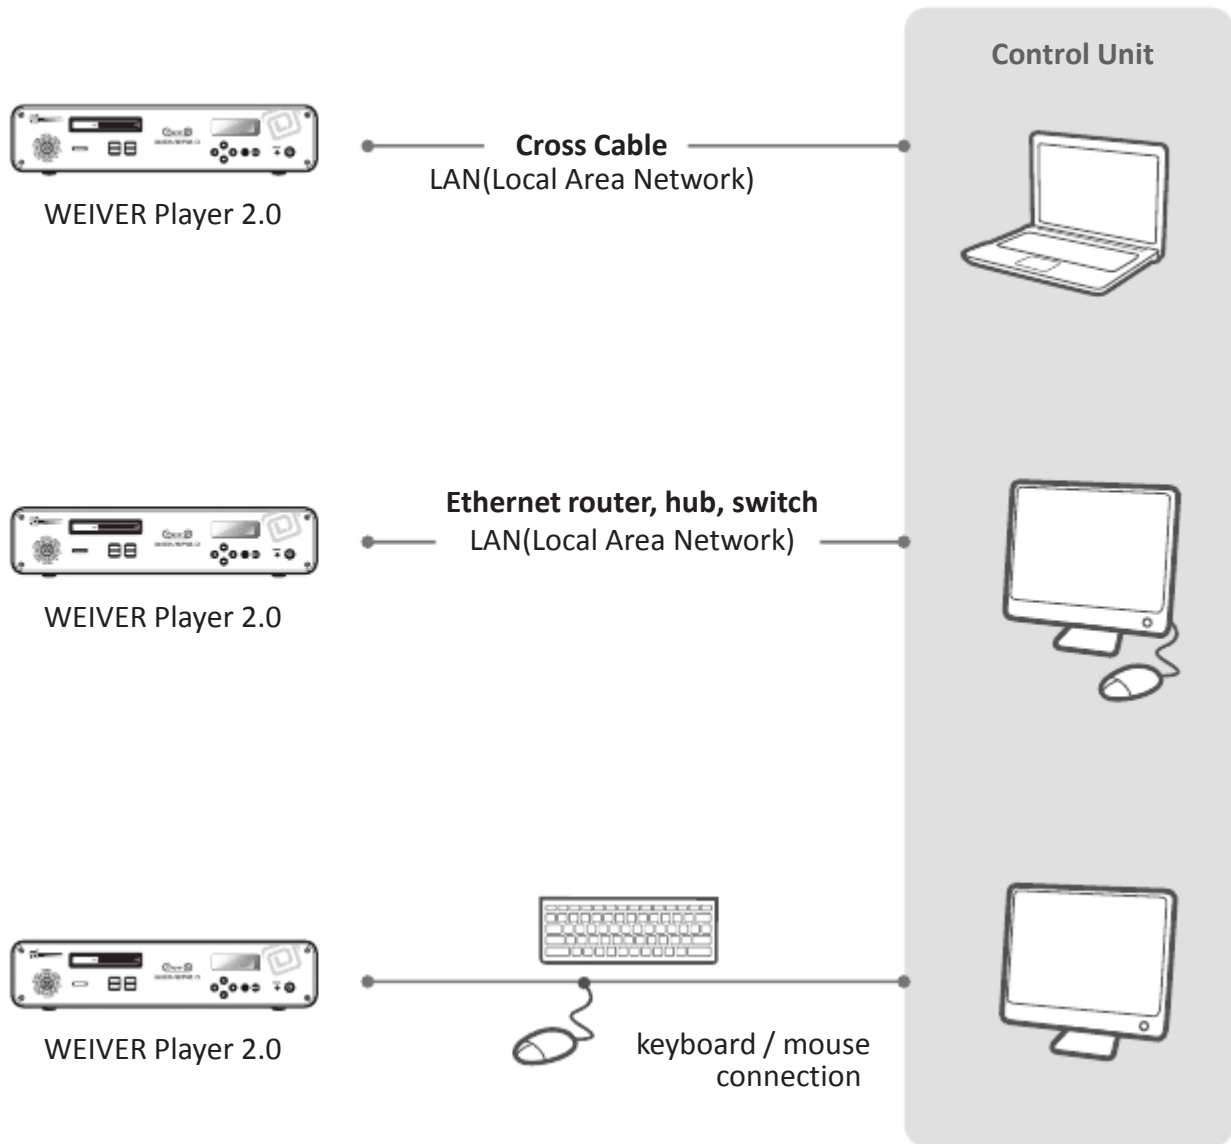

1.4 System Specification

Frequency	
Frequency band	0.1 to 2700 MHz
Real time bandwidth	56MHz max. (Arbitrary variable BW, 1Hz step)
Frequency resolution	1Hz min.
Warm-up time	30 minutes (typ.)
Freq. Stability vs. Temp.	±20 ppb max.
Daily Aging	±1 ppb max.
Aging (PER year)	±50 ppb max.

Spectral Purity	
Phase Noise@1 KHz set	≤ -100 dBc/Hz (30 MHz) ≤ -95 dBc/Hz (1 GHz) ≤ -90 dBc/Hz (2.7 GHz)
Phase Noise@10 KHz set	≤ -105 dBc/Hz (30 MHz) ≤ -100 dBc/Hz (1 GHz) ≤ -95 dBc/Hz (2.7 GHz)

Spurious Responses	
2nd Harmonic	≤ -50dBc
3rd Harmonic	≤ -60dBc
other	≤ -60dBc

RF Output Characteristics	
Gain range	-30 ~ +30dB (Input Level Basis)
Amplitude Resolution	0.1dB step (Min.) ±1dB
Amplitude accuracy	+3 dBm max.(48 to 2700MHz)
Power	+10 dBm max.(0.1 to 48 MHz)


RF Output	
RF output port	50ohm, N type female, DC-coupled
Max. DC input	±25 VDC max.
Max. reverse RF power	1 W (Max.)

Environment	
Operating temperature	0 to +50
Relative humidity	90%
Storage temperature	-20 to +70

Power	
Input power	100-240V ~ 3-1.5A, 50-60Hz
Lowest Power Consumption	70 Watt

Mechanical	
Dimensions	(W)478mm x (H)88mm x (D)462mm
Weight	7.5 kg (Approx.)

1.5 WEIVER 2.0 Player Components-1

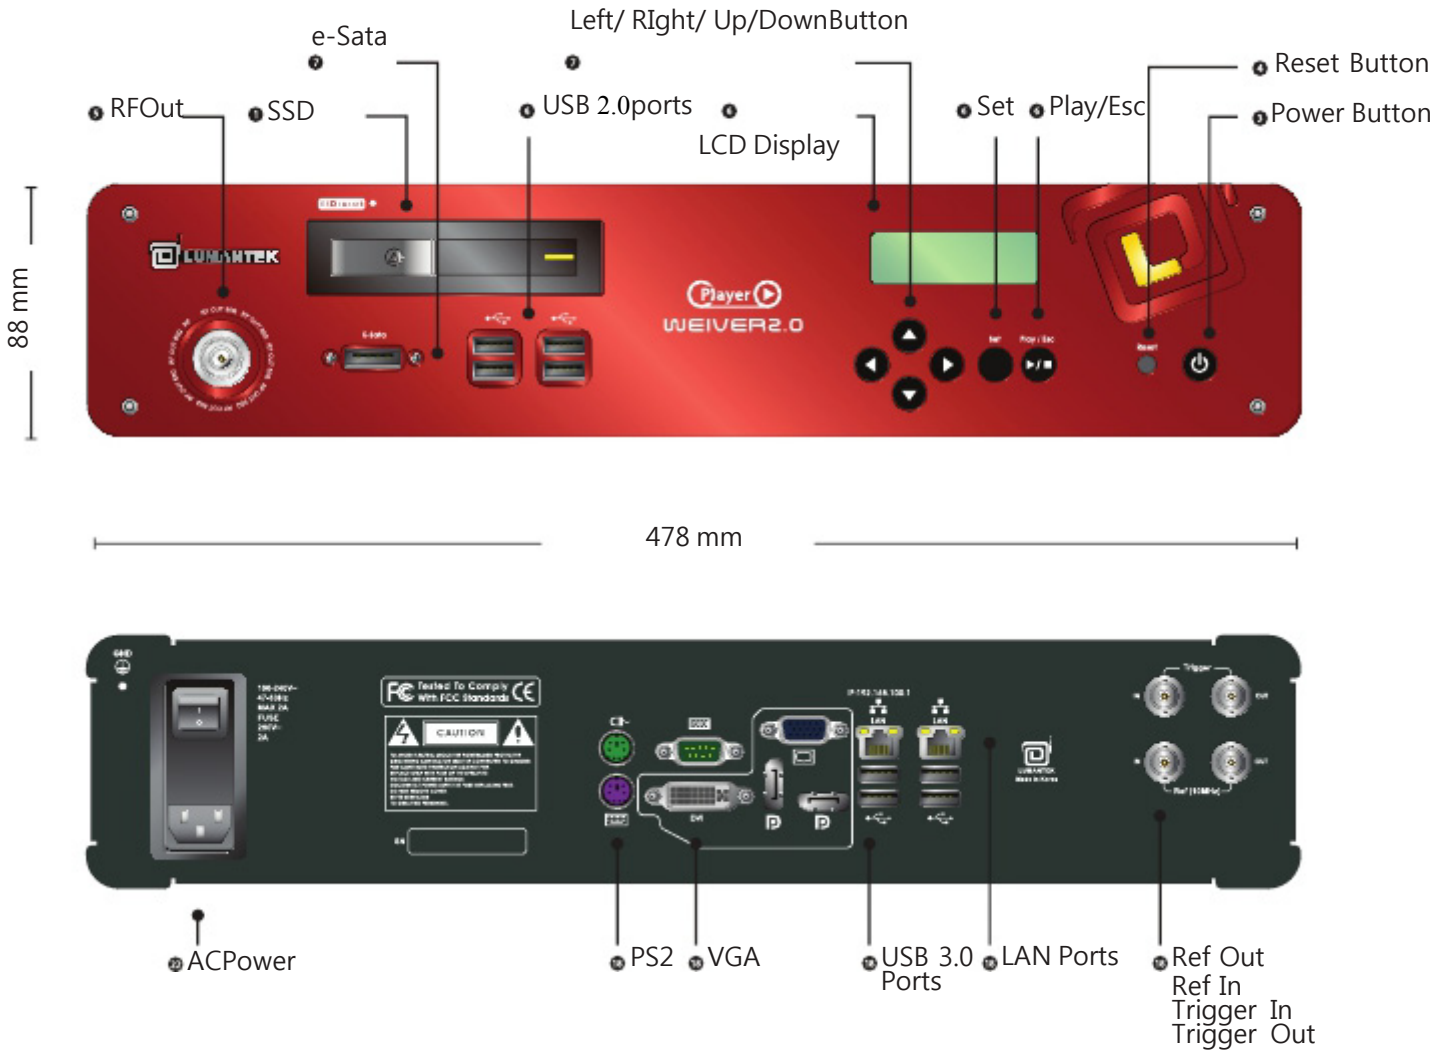

1.6 WEIVER 2.0 Player Components-2

- Basic Component



WEIVER 2.0 Player Body



WEIVER 2.0 Player AC Cord

WEIVER 2.0 Player USB

- Weiver_EX Program
- Weiver HD Radio Program
- WEIVER 2.0 Player Operation Manual
- WEIVER 2.0 PlayerTest Report
- WEIVER 2.0 Player Restore Data




- Optional Component



WEIVER External SSD



WEIVER External SSD USB Power



WEIVER External SSD e-SATA Cable

1.7 Installation precautions

This section describes safety precautions that users shall be aware of during the system Installation and operation. Not complying such precautions may result in serious harm or personal injuries. . For that reason, please keep all details here in mind before installing or using WEIVER 2.0 Player. [Please carefully read the followings for safe use of Weiver 2.0 Player](#)

General Precautions

- ① Must be operated and maintained free of dust or dirt.
- ② The cover should be securely fastened.
- ③ Securely stow all the cables, external antennas, external SSD or any other tools away in a safe place after its use.
- ④ Avoid wearing loose, draping clothing, and dangling jewelry when using WEIVER 2.0 Player.
- ⑤ Do not open the WEIVER 2.0 Player case. Doing so may void the warranty and LUMANTEK takes no responsibility for the damages caused by such action. Should you be experiencing performance issues, please contact your local dealer for assistance.

Power Precautions

- ① Make sure if it may cause overload in wiring when you connect the power source.
- ② Avoid wearing necklaces or watches when connecting the system to power sources. These may cause electronic shocks to the system.
- ③ Avoid operating on a wet floor out in the open (e.g., raining). Make sure the power extension cable is in satisfactory condition (e.g., not worn out).
- ④ Disconnect the system from power source before hardware installation, rub or contact on the metal surface of the system to discharge statics from your body.
- ⑤ Note: Manufacturer is not responsible for damages caused by using or replacing inappropriate components or not authorized services.
- ⑥ Supplying power during installation may cause serious damages to the system and personal injuries.

AC Power

- ① This unit comes with the AC power cord, grounding connection is necessary.
- ② In the event of a fire, please disconnect the system from power source.

Log-off Caution

- ① [Do NOT log off while “Remote Desktop “is running. You must shut-down the program by pressing](#)
- ② [the close\[x\] button on top right. If you log-off the player, running program will be stopped and](#)
- ③ [“Please Wait” sign will be appeared on front panel.](#)
- ④ [To recover from this state, you must log-on again after connecting the keyboard & monitor.](#)

2.1 HD Radio Vector Signal generator – Version Info

[Weiver HD Radio RF Playback System specification]


Same as Weiver 2.0 Player specification

[Weiver HD Radio Version Information]

WeiverPlayer: 2.2.0.4 or above

DSP: 4.6.1.0(HW 1.6) or above

Weiver HD Radio: 1.0.0.0 or above

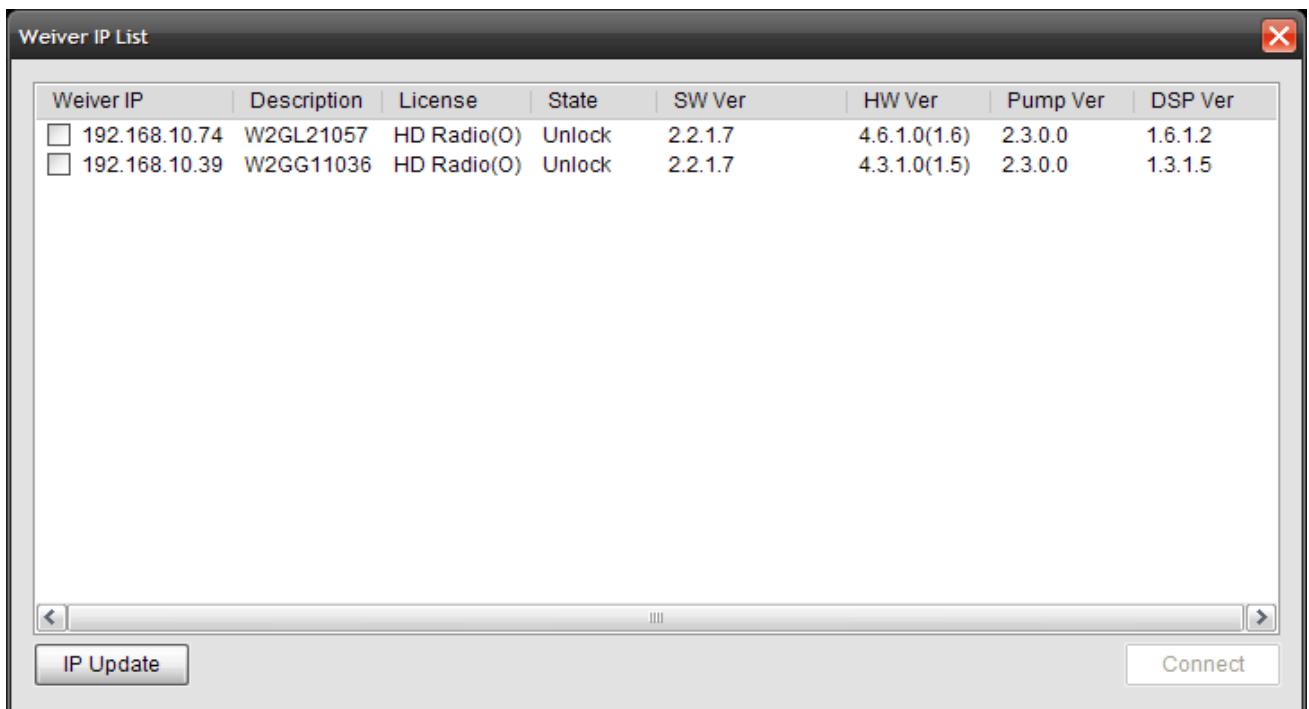

The screenshot shows a window titled "Weiver IP List" with a close button in the top right corner. The window contains a table with the following data:

Weiver IP	Description	License	State	SW Ver	HW Ver	Pump Ver	DSP Ver
<input type="checkbox"/> 192.168.10.74	W2GL21057	HD Radio(O)	Unlock	2.2.1.7	4.6.1.0(1.6)	2.3.0.0	1.6.1.2
<input type="checkbox"/> 192.168.10.39	W2GG11036	HD Radio(O)	Unlock	2.2.1.7	4.3.1.0(1.5)	2.3.0.0	1.3.1.5

At the bottom of the window, there is a scroll bar and two buttons: "IP Update" on the left and "Connect" on the right.

2.2 Vector File List

[Weiver HD Radio Vector Files] Total 660 Files

AM files : 229 / FM files: 431

Caution: Do NOT change the file names. It won't be shown on the file list if the file name has been changed.

[AM] 229 file

IB_AMr001_e1_cw_0_m10.bin	IB_AMr208_e1awfc00.bin	IB_AMr430_e1wfr1027.bin
IB_AMr001_e1_cw_2_6.bin	IB_AMr208_e1awfc04.bin	IB_AMr430_e1wfr1028.bin
IB_AMr001_e1_cw_m1_m2.bin	IB_AMr208_e1awfc06.bin	IB_AMr440a_e1wfr1405.bin
IB_AMr001_e1_cw_m30_0_30.bin	IB_AMr208_e1awfc08.bin	IB_AMr440a_e1wfr1432.bin
IB_AMr001_e1_cw_m7p5_10.bin	IB_AMr208_e1awfc10.bin	IB_AMr440_e1wfr1116.bin
IB_AMr201_e1awfc52.bin	IB_AMr208_e1awfc11.bin	IB_AMr440_e1wfr1117.bin
IB_AMr201_e1awfr1190.bin	IB_AMr208_e1awfc19.bin	IB_AMr440_e1wfr1400.bin
IB_AMr208a_e1awfb00.bin	IB_AMr208_e1awfc20.bin	IB_AMr440_e1wfr1401.bin
IB_AMr208a_e1awfb138.bin	IB_AMr208_e1awfc23.bin	IB_AMr440_e1wfr1402.bin
IB_AMr208a_e1awfc33.bin	IB_AMr208_e1awfc24.bin	IB_AMr440_e1wfr1403.bin
IB_AMr208a_e1awfc34.bin	IB_AMr208_e1awfc26.bin	IB_AMr440_e1wfr1404.bin
IB_AMr208b_e1awfr1123.bin	IB_AMr208_e1awfc27.bin	IB_AMr440_e1wfr1407.bin
IB_AMr208c_e1awfa11.bin	IB_AMr208_e1awfc29.bin	IB_AMr440_e1wfr1408.bin
IB_AMr208c_e1awfr1124.bin	IB_AMr208_e1awfc30.bin	IB_AMr440_e1wfr1414.bin
IB_AMr208_e1awfa05.bin	IB_AMr208_e1awfc31.bin	IB_AMr440_e1wfr1415.bin
IB_AMr208_e1awfa07.bin	IB_AMr208_e1awfc32.bin	IB_AMr440_e1wfr1431.bin
IB_AMr208_e1awfa10.bin	IB_AMr208_e1awfr1221.bin	IB_AMr440_e1wfr1442.bin
IB_AMr208_e1awfb01.bin	IB_AMr208_e1awfr1249.bin	IB_AMr440_e1wfr1443.bin
IB_AMr208_e1awfb02.bin	IB_AMr208_e1awfr1260.bin	IB_AMr450_e1awfa10.bin
IB_AMr208_e1awfb03.bin	IB_AMr220_e1awfc28.bin	IB_AMr450_e1wfr1465.bin
IB_AMr208_e1awfb04.bin	IB_AMr230a_e1awfr1001.bin	IB_AMr450_e1wfr1466.bin
IB_AMr208_e1awfb05.bin	IB_AMr230a_e1awfr1002.bin	IB_AMr450_e1wfr1467.bin
IB_AMr208_e1awfb102.bin	IB_AMr230b_e1awfc102.bin	IB_AMr450_e1wfr1468.bin
IB_AMr208_e1awfb104.bin	IB_AMr230d_e1awfr12.bin	IB_AMr450_e1wfr1469.bin
IB_AMr208_e1awfb111.bin	IB_AMr230_e1awfr1005.bin	IB_AMr450_e1wfr1470.bin
IB_AMr208_e1awfb113.bin	IB_AMr230_e1awfr1187.bin	IB_AMr450_e1wfr1471.bin
IB_AMr208_e1awfb119.bin	IB_AMr230_e1awfr1261.bin	IB_AMr450_e1wfr1472.bin
IB_AMr208_e1awfb121.bin	IB_AMr430_e1wfr1016.bin	IB_AMr450_e1wfr1473.bin
IB_AMr208_e1awfb124.bin	IB_AMr430_e1wfr1017.bin	IB_AMr450_e1wfr1474.bin
IB_AMr208_e1awfb126.bin	IB_AMr430_e1wfr1018.bin	IB_AMr450_e1wfr1475.bin
IB_AMr208_e1awfb128.bin	IB_AMr430_e1wfr1019.bin	IB_AMr450_e1wfr1507.bin
IB_AMr208_e1awfb130.bin	IB_AMr430_e1wfr1020.bin	IB_AMr450_e1wfr1508.bin
IB_AMr208_e1awfb131.bin	IB_AMr430_e1wfr1021.bin	IB_AMr450_e1wfr1509.bin
IB_AMr208_e1awfb132.bin	IB_AMr430_e1wfr1022.bin	IB_AMr450_e1wfr1510.bin
IB_AMr208_e1awfb134.bin	IB_AMr430_e1wfr1023.bin	IB_AM_e1a_CW_dc.bin
IB_AMr208_e1awfb135.bin	IB_AMr430_e1wfr1024.bin	IB_AM_e1_awgn.bin
IB_AMr208_e1awfb145.bin	IB_AMr430_e1wfr1025.bin	IB_AMr440a_e1wfr1405.bin
IB_AMr208_e1awfb243.bin	IB_AMr430_e1wfr1026.bin	IB_AMr440a_e1wfr1406.bin

[AM] 229 file

IB_AMr440a_e1wfr1427.bin
IB_AMr440a_e1wfr1432.bin
IB_AMr440_e1wfr1400.bin
IB_AMr440_e1wfr1401.bin
IB_AMr440_e1wfr1402.bin
IB_AMr440_e1wfr1403.bin
IB_AMr440_e1wfr1404.bin
IB_AMr440_e1wfr1407.bin
IB_AMr440_e1wfr1408.bin
IB_AMr440_e1wfr1409.bin
IB_AMr440_e1wfr1410.bin
IB_AMr440_e1wfr1413.bin
IB_AMr440_e1wfr1414.bin
IB_AMr440_e1wfr1415.bin
IB_AMr440_e1wfr1418.bin
IB_AMr440_e1wfr1419.bin
IB_AMr440_e1wfr1421.bin
IB_AMr440_e1wfr1422.bin
IB_AMr440_e1wfr1423.bin
IB_AMr440_e1wfr1424.bin
IB_AMr440_e1wfr1426.bin
IB_AMr440_e1wfr1426_AW-
GN_67dB_240frames.bin
IB_AMr440_e1wfr1426_AW-
GN_70dB_240frames.bin
IB_AMr440_e1wfr1426_AW-
GN_74dB_240frames.bin
IB_AMr440_e1wfr1426_AW-
GN_76dB_240frames.bin
IB_AMr440_e1wfr1428.bin
IB_AMr440_e1wfr1429.bin
IB_AMr440_e1wfr1430.bin
IB_AMr440_e1wfr1431.bin
IB_AMr440_e1wfr1434.bin
IB_AMr440_e1wfr1435.bin
IB_AMr440_e1wfr1436.bin
IB_AMr440_e1wfr1438.bin
IB_AMr440_e1wfr1439.bin
IB_AMr440_e1wfr1440.bin
IB_AMr440_e1wfr1442.bin
IB_AMr440_e1wfr1443.bin
IB_AMr440_e1wfr1444.bin
IB_AMr440_e1wfr1445.bin
IB_AMr440_e1wfr1446.bin
IB_AMr440_e1wfr1447.bin
IB_AMr440_e1wfr1448.bin
IB_AMr440_e1wfr1449.bin
IB_AMr440_e1wfr1451.bin

IB_AMr440_e1wfr1452.bin
IB_AMr440_e1wfr1453.bin
IB_AMr440_e1wfr1454.bin
IB_AMr440_e1wfr1455.bin
IB_AMr440_e1wfr1456.bin
IB_AMr440_e1wfr1457.bin
IB_AMr440_e1wfr1458.bin
IB_AMr440_e1wfr1459.bin
IB_AMr208a_e1awfb00.bin
IB_AMr208_e1awfb01.bin
IB_AMr208_e1awfr1225.bin
IB_AMr208_e1awfr1226.bin
IB_AMr208_e1awfr1227.bin
IB_AMr208_e1awfr1228.bin
IB_AMr208_e1awfr1229.bin
IB_AMr208_e1awfr1230.bin
IB_AMr208_e1awfr1231.bin
IB_AMr208_e1awfr1232.bin
IB_AMr208_e1awfr1233.bin
IB_AMr208_e1awfr1234.bin
IB_AMr208_e1awfr1235.bin
IB_AMr208_e1awfr1236.bin
IB_AMr208_e1awfr1237.bin
IB_AMr208_e1awfr1238.bin
IB_AMr208_e1awfr1239.bin
IB_AMr208_e1awfr1240.bin
IB_AMr208_e1awfr1241.bin
IB_AMr208_e1awfr1242.bin
IB_AMr208_e1awfr1244.bin
IB_AMr430_e1wfr1020.bin
IB_AMr430_e1wfr1021.bin
IB_AMr430_e1wfr1022.bin
IB_AMr430_e1wfr1023.bin
IB_AMr430_e1wfr1024.bin
IB_AMr430_e1wfr1025.bin
IB_AMr430_e1wfr1026.bin
IB_AMr430_e1wfr1027.bin
IB_AMr430_e1wfr1610.bin
IB_AMr430_e1wfr1611.bin
IB_AMr430_e1wfr1612.bin
IB_AMr430_e1wfr1613.bin
IB_AMr430_e1wfr1614.bin
IB_AMr430_e1wfr1615.bin
IB_AMr430_e1wfr1616.bin
IB_AMr430_e1wfr1617.bin
IB_AMr430_e1wfr1618.bin
IB_AMr430_e1wfr1619.bin
IB_AMr430_e1wfr1620.bin

IB_AMr430_e1wfr1621.bin
IB_AMr430_e1wfr1622.bin
IB_AMr430_e1wfr1623.bin
IB_AMr430_e1wfr1624.bin
IB_AMr430_e1wfr1625.bin
IB_AMr430_e1wfr1626.bin
IB_AMr208_e1awfc07.bin
IB_AMr220_e1awfc06.bin
IB_AMr230d_e1awfd130.bin
IB_AMr230_e1awfa38.bin
IB_AM_e1_46512_Garden_Grove.bin
IB_AMr500_e1wfr1812.bin
IB_AMr500_e1wfa1835.bin
IB_AMr500_e1wfa1836.bin
IB_AMr500_e1wfa1837.bin
IB_AMr500_e1wfa1838.bin
IB_AMr500_e1wfa1839.bin
IB_AMr500_e1wfa1840.bin
IB_AMr500_e1wfa1841.bin
IB_AMr500_e1wfa1842.bin
IB_AMr500_e1wfa1843.bin
IB_AMr500_e1wfa1844.bin
IB_AMr500_e1wfa1845.bin

[FM] 431 file

IB_FMr001_e1_cw_0_100.bin
IB_FMr001_e1_cw_0_m100.bin
IB_FMr001_e1_cw_0_m200.bin
IB_FMr001_e1_cw_10_20.bin
IB_FMr001_e1_cw_50_100.bin
IB_FMr001_e1_cw_m275_0_275.bin
IB_FMr001_e1_cw_m50_0.bin
IB_FMr001_e1_cw_m80_m90.bin
IB_FMr201_e1wfc52.bin
IB_FMr201_e1wfr1189.bin
IB_FMr208c_e1wfa05.bin
IB_FMr208c_e1wfa25.bin
IB_FMr208c_e1wfa98.bin
IB_FMr208c_e1wfa99.bin
IB_FMr208c_e1wfc00.bin
IB_FMr208c_e1wfc03.bin
IB_FMr208c_e1wfc08.bin
IB_FMr208c_e1wfc09.bin
IB_FMr208c_e1wfc10.bin
IB_FMr208c_e1wfc201.bin
IB_FMr208c_e1wfc203.bin
IB_FMr208c_e1wfc204.bin

[FM] 431 file

IB_FMr208c_e1wfc206.bin
IB_FMr208c_e1wfc209.bin
IB_FMr208c_e1wfc210.bin
IB_FMr208c_e1wfc211.bin
IB_FMr208c_e1wfc227.bin
IB_FMr208c_e1wfc230.bin
IB_FMr208c_e1wfc27.bin
IB_FMr208c_e1wfc28.bin
IB_FMr208c_e1wfc30.bin
IB_FMr208c_e1wfc46.bin
IB_FMr208c_e1wfc546.bin
IB_FMr208c_e1wfc547.bin
IB_FMr208c_e1wfc548.bin
IB_FMr208c_e1wfc90.bin
IB_FMr208d_e1wfa141.bin
IB_FMr208d_e1wfc208.bin
IB_FMr208d_e1wfc538.bin
IB_FMr208d_e1wfc540.bin
IB_FMr208d_e1wfc542.bin
IB_FMr208d_e1wfc549.bin
IB_FMr208e_e1wfc12.bin
IB_FMr208e_e1wfc13.bin
IB_FMr208g_e1wfc94.bin
IB_FMr208i_e1wfa58.bin
IB_FMr208j_e1wfa105.bin
IB_FMr208j_e1wfa106.bin
IB_FMr208j_e1wfa107.bin
IB_FMr208j_e1wfa109.bin
IB_FMr208j_e1wfa11.bin
IB_FMr208j_e1wfc31.bin
IB_FMr208j_e1wfc89.bin
IB_FMr208_e1wfr1122.bin
IB_FMr208_e1wfr1185.bin
IB_FMr208_e1wfr1246.bin
IB_FMr208_e1wfr1247.bin
IB_FMr208_e1wfr1248.bin
IB_FMr220a_e1wfc100.bin
IB_FMr220a_e1wfc101.bin
IB_FMr220a_e1wfc553.bin
IB_FMr220a_e1wfc555.bin
IB_FMr220b_e1wfr1119.bin
IB_FMr220b_e1wfr1120.bin
IB_FMr220c_e1wfr1191.bin
IB_FMr220_e1wfa108.bin
IB_FMr220_e1wfr1121.bin
IB_FMr230a_e1wfa153.bin
IB_FMr230a_e1wfc102.bin
IB_FMr230a_e1wfr1000.bin

IB_FMr230a_e1wfr1001.bin
IB_FMr230a_e1wfr1003.bin
IB_FMr230a_e1wfr1004.bin
IB_FMr230a_e1wfr1005.bin
IB_FMr230a_e1wfr1006.bin
IB_FMr230a_e1wfr1007.bin
IB_FMr230a_e1wfr1008.bin
IB_FMr230a_e1wfr1009.bin
IB_FMr230a_e1wfr1011.bin
IB_FMr230a_e1wfr1012.bin
IB_FMr230a_e1wfr1013.bin
IB_FMr230a_e1wfr1037.bin
IB_FMr230a_e1wfr1271.bin
IB_FMr230b_e1wfr1002.bin
IB_FMr230b_e1wfr1010.bin
IB_FMr230b_e1wfr1024.bin
IB_FMr230c_e1wfd204.bin
IB_FMr230c_e1wfr1022.bin
IB_FMr230d_e1wfa78.bin
IB_FMr230d_e1wfr1025.bin
IB_FMr230f_e1wfr1023.bin
IB_FMr230_e1wfc14.bin
IB_FMr230_e1wfr1061.bin
IB_FMr230_e1wfr1270.bin
IB_FMr230_e1wfr1272.bin
IB_FMr230_e1wfr1273.bin
IB_FMr230_e1wfr143.bin
IB_FMr430a_e1wfr1081.bin
IB_FMr430a_e1wfr1085.bin
IB_FMr430_e1wfr1080.bin
IB_FMr430_e1wfr1082.bin
IB_FMr430_e1wfr1083.bin
IB_FMr430_e1wfr1086.bin
IB_FMr430_e1wfr1087.bin
IB_FMr430_e1wfr1088.bin
IB_FMr430_e1wfr1089.bin
IB_FMr430_e1wfr1090.bin
IB_FMr430_e1wfr1091.bin
IB_FMr430_e1wfr1092.bin
IB_FMr430_e1wfr1093.bin
IB_FMr430_e1wfr1094.bin
IB_FMr430_e1wfr1095.bin
IB_FMr430_e1wfr1096.bin
IB_FMr430_e1wfr1097.bin
IB_FMr430_e1wfr1098.bin
IB_FMr430_e1wfr1099.bin
IB_FMr430_e1wfr1100.bin
IB_FMr430_e1wfr1101.bin

IB_FMr430_e1wfr1102.bin
IB_FMr430_e1wfr1152.bin
IB_FMr440a_e1wfr1303.bin
IB_FMr440a_e1wfr1304.bin
IB_FMr440a_e1wfr1305.bin
IB_FMr440a_e1wfr1314.bin
IB_FMr440a_e1wfr1331.bin
IB_FMr440a_e1wfr1342.bin
IB_FMr440b_e1wfr1300.bin
IB_FMr440b_e1wfr1307.bin
IB_FMr440_e1wfr1111.bin
IB_FMr440_e1wfr1112.bin
IB_FMr440_e1wfr1113.bin
IB_FMr440_e1wfr1114.bin
IB_FMr440_e1wfr1115.bin
IB_FMr440_e1wfr1243.bin
IB_FMr440_e1wfr1274.bin
IB_FMr440_e1wfr1275.bin
IB_FMr440_e1wfr1276.bin
IB_FMr440_e1wfr1277.bin
IB_FMr440_e1wfr1278.bin
IB_FMr440_e1wfr1279.bin
IB_FMr440_e1wfr1301.bin
IB_FMr440_e1wfr1302.bin
IB_FMr440_e1wfr1315.bin
IB_FMr440_e1wfr1332.bin
IB_FMr440_e1wfr1343.bin
IB_FMr440_e1wfr1362.bin
IB_FMr440_e1wfr1523.bin
IB_FMr450_e1wfc31.bin
IB_FMr450_e1wfr1380.bin
IB_FMr450_e1wfr1381.bin
IB_FMr450_e1wfr1382.bin
IB_FMr450_e1wfr1383.bin
IB_FMr450_e1wfr1384.bin
IB_FMr450_e1wfr1385.bin
IB_FMr450_e1wfr1386.bin
IB_FMr450_e1wfr1387.bin
IB_FMr450_e1wfr1388.bin
IB_FMr450_e1wfr1389.bin
IB_FMr450_e1wfr1390.bin
IB_FMr450_e1wfr1391.bin
IB_FMr450_e1wfr1392.bin
IB_FMr450_e1wfr1502.bin
IB_FMr450_e1wfr1503.bin
IB_FMr450_e1wfr1504.bin
IB_FMr450_e1wfr1505.bin
IB_FMr450_e1wfr1506.bin

[FM] 431 file

IB_FMr450_e1wfr1520.bin	IB_FMr440_e1wfr1301.bin	IB_FMr208_e1wfr1155.bin
IB_FM_e1_awgn.bin	IB_FMr440_e1wfr1302.bin	IB_FMr208_e1wfr1156.bin
IB_FM_e1_CW_dc.bin	IB_FMr440_e1wfr1308.bin	IB_FMr208_e1wfr1157.bin
IB_FMr450_e1wfr1723.bin	IB_FMr440_e1wfr1309.bin	IB_FMr208_e1wfr1158.bin
IB_FMr440a_e1wfr1303.bin	IB_FMr440_e1wfr1311.bin	IB_FMr208_e1wfr1159.bin
IB_FMr440a_e1wfr1304.bin	IB_FMr440_e1wfr1312.bin	IB_FMr208_e1wfr1160.bin
IB_FMr440a_e1wfr1305.bin	IB_FMr440_e1wfr1315.bin	IB_FMr208_e1wfr1161.bin
IB_FMr440a_e1wfr1306.bin	IB_FMr440_e1wfr1316.bin	IB_FMr208_e1wfr1162.bin
IB_FMr440a_e1wfr1310.bin	IB_FMr440_e1wfr1321.bin	IB_FMr208_e1wfr1163.bin
IB_FMr440a_e1wfr1313.bin	IB_FMr440_e1wfr1322.bin	IB_FMr208_e1wfr1164.bin
IB_FMr440a_e1wfr1314.bin	IB_FMr440_e1wfr1324.bin	IB_FMr208_e1wfr1165.bin
IB_FMr440a_e1wfr1318.bin	IB_FMr440_e1wfr1329.bin	IB_FMr208_e1wfr1166.bin
IB_FMr440a_e1wfr1319.bin	IB_FMr440_e1wfr1332.bin	IB_FMr208_e1wfr1167.bin
IB_FMr440a_e1wfr1320.bin	IB_FMr440_e1wfr1336.bin	IB_FMr208_e1wfr1168.bin
IB_FMr440a_e1wfr1323.bin	IB_FMr440_e1wfr1338.bin	IB_FMr208_e1wfr1169.bin
IB_FMr440a_e1wfr1327.bin	IB_FMr440_e1wfr1340.bin	IB_FMr208_e1wfr1170.bin
IB_FMr440a_e1wfr1330.bin	IB_FMr440_e1wfr1343.bin	IB_FMr208_e1wfr1171.bin
IB_FMr440a_e1wfr1331.bin	IB_FMr440_e1wfr1344.bin	IB_FMr208_e1wfr1172.bin
IB_FMr440a_e1wfr1334.bin	IB_FMr440_e1wfr1345.bin	IB_FMr208_e1wfr1173.bin
IB_FMr440a_e1wfr1335.bin	IB_FMr440_e1wfr1346.bin	IB_FMr208_e1wfr1174.bin
IB_FMr440a_e1wfr1339.bin	IB_FMr440_e1wfr1347.bin	IB_FMr208_e1wfr1175.bin
IB_FMr440a_e1wfr1342.bin	IB_FMr440_e1wfr1348.bin	IB_FMr208_e1wfr1176.bin
IB_FMr440a_e1wfr1352.bin	IB_FMr440_e1wfr1349.bin	IB_FMr208_e1wfr1177.bin
IB_FMr440a_e1wfr1352_Log_	IB_FMr440_e1wfr1350.bin	IB_FMr208_e1wfr1178.bin
Normal_62dB_400frames.bin	IB_FMr440_e1wfr1351.bin	IB_FMr208_e1wfr1179.bin
IB_FMr440a_e1wfr1352_Log_	IB_FMr440_e1wfr1356.bin	IB_FMr208_e1wfr1180.bin
Normal_63dB_400frames.bin	IB_FMr440_e1wfr1357.bin	IB_FMr208_e1wfr1181.bin
IB_FMr440a_e1wfr1352_Log_	IB_FMr440_e1wfr1358.bin	IB_FMr208_e1wfr1182.bin
Normal_64dB_400frames.bin	IB_FMr440_e1wfr1359.bin	IB_FMr208_e1wfr1183.bin
IB_FMr440a_e1wfr1352_Log_	IB_FMr440_e1wfr1360.bin	IB_FMr208_e1wfr1184.bin
Normal_66dB_400frames.bin	IB_FMr440_e1wfr1361.bin	IB_FMr430_e1wfr1125.bin
IB_FMr440a_e1wfr1352_Log_	IB_FMr440_e1wfr1362.bin	IB_FMr430_e1wfr1126.bin
Normal_68dB_400frames.bin	IB_FMr440_e1wfr1363.bin	IB_FMr430_e1wfr1127.bin
IB_FMr440a_e1wfr1353.bin	IB_FMr440_e1wfr1364.bin	IB_FMr430_e1wfr1128.bin
IB_FMr440a_e1wfr1354.bin	IB_FMr440_e1wfr1365.bin	IB_FMr430_e1wfr1129.bin
IB_FMr440a_e1wfr1355.bin	IB_FMr440_e1wfr1366.bin	IB_FMr430_e1wfr1130.bin
IB_FMr440b_e1wfr1300.bin	IB_FMr440_e1wfr1367.bin	IB_FMr430_e1wfr1131.bin
IB_FMr440b_e1wfr1307.bin	IB_FMr450_e1wfb1753.bin	IB_FMr430_e1wfr1132.bin
IB_FMr440b_e1wfr1326.bin	IB_FMr450_e1wfb1754.bin	IB_FMr430_e1wfr1133.bin
IB_FMr440b_e1wfr1328.bin	IB_FMr450_e1wfb1755.bin	IB_FMr430_e1wfr1134.bin
IB_FMr440b_e1wfr1328_Log_	IB_FMr450_e1wfb1756.bin	IB_FMr430_e1wfr1135.bin
Normal_62dB_400frames.bin	IB_FMr450_e1wfb1757.bin	IB_FMr430_e1wfr1136.bin
IB_FMr440b_e1wfr1328_Log_	IB_FMr208a_e1wfr1600.bin	IB_FMr430_e1wfr1137.bin
Normal_63dB_400frames.bin	IB_FMr208a_e1wfr1601.bin	IB_FMr430_e1wfr1138.bin
IB_FMr440b_e1wfr1328_Log_	IB_FMr208c_e1wfc204.bin	IB_FMr430_e1wfr1139.bin
Normal_64dB_400frames.bin	IB_FMr208c_e1wfc209.bin	IB_FMr430_e1wfr1140.bin
IB_FMr440b_e1wfr1328_Log_	IB_FMr208_e1wfr1153.bin	IB_FMr430_e1wfr1141.bin
Normal_66dB_400frames.bin	IB_FMr208_e1wfr1154.bin	IB_FMr430_e1wfr1142.bin

[FM] 431 file

IB_FMr430_e1wfr1143.bin
IB_FMr430_e1wfr1144.bin
IB_FMr430_e1wfr1145.bin
IB_FMr430_e1wfr1146.bin
IB_FMr430_e1wfr1147.bin
IB_FMr430_e1wfr1148.bin
IB_FMr430_e1wfr1149.bin
IB_FMr430_e1wfr1150.bin
IB_FMr430_e1wfr1151.bin
IB_FMr430_e1wfr1152.bin
IB_FMr430_e1wfr1192.bin
IB_FMr430_e1wfr1193.bin
IB_FMr430_e1wfr1194.bin
IB_FMr430_e1wfr1195.bin
IB_FMr430_e1wfr1196.bin
IB_FMr430_e1wfr1197.bin
IB_FMr430_e1wfr1198.bin
IB_FMr430_e1wfr1199.bin
IB_FMr430_e1wfr1200.bin
IB_FMr430_e1wfr1201.bin
IB_FMr430_e1wfr1202.bin
IB_FMr430_e1wfr1203.bin
IB_FMr430_e1wfr1204.bin
IB_FMr430_e1wfr1205.bin
IB_FMr430_e1wfr1206.bin
IB_FMr430_e1wfr1207.bin
IB_FMr430_e1wfr1208.bin
IB_FMr430_e1wfr1209.bin
IB_FMr430_e1wfr1210.bin
IB_FMr430_e1wfr1211.bin
IB_FMr430_e1wfr1212.bin
IB_FMr430_e1wfr1213.bin
IB_FMr430_e1wfr1214.bin
IB_FMr430_e1wfr1215.bin
IB_FMr430_e1wfr1216.bin
IB_FMr430_e1wfr1217.bin
IB_FMr430_e1wfr1218.bin
IB_FMr430_e1wfr1219.bin
IB_FMr208c_e1wfa05.bin
IB_FMr208c_e1wfa121.bin
IB_FMr208c_e1wfa127.bin
IB_FMr208c_e1wfa140.bin
IB_FMr208c_e1wfa142.bin
IB_FMr208c_e1wfa144.bin
IB_FMr208c_e1wfa145.bin
IB_FMr208c_e1wfa50.bin
IB_FMr208c_e1wfa51.bin
IB_FMr208c_e1wfa52.bin
IB_FMr208c_e1wfa53.bin
IB_FMr208c_e1wfa54.bin
IB_FMr208c_e1wfc70.bin
IB_FMr208c_e1wfc71.bin
IB_FMr208c_e1wfc72.bin
IB_FMr208d_e1wfa143.bin
IB_FMr208d_e1wfa146.bin
IB_FMr208i_e1wfd112.bin
IB_FMr208i_e1wfd113.bin
IB_FMr208i_e1wfd114.bin
IB_FMr208j_e1wfa109.bin
IB_FMr208k_e1wfa104.bin
IB_FMr220a_e1wfa105.bin
IB_FMr220e_e1wfa104.bin
IB_FMr220t_e1wfa103.bin
IB_FMr220_e1wfa105.bin
IB_FMr220_e1wfa106.bin
IB_FMr220_e1wfa107.bin
IB_FMr220_e1wfa108.bin
IB_FMr220_e1wfa109.bin
IB_FMr220_e1wfa110.bin
IB_FMr220_e1wfa111.bin
IB_FMr220_e1wfa112.bin
IB_FMr220_e1wfa113.bin
IB_FMr220_e1wfa122.bin
IB_FMr220_e1wfa123.bin
IB_FMr220_e1wfa124.bin
IB_FMr220_e1wfa125.bin
IB_FMr220_e1wfa126.bin
IB_FMr220_e1wfa128.bin
IB_FMr220_e1wfa129.bin
IB_FMr220_e1wfa130.bin
IB_FMr220_e1wfa131.bin
IB_FMr220_e1wfa132.bin
IB_FMr220_e1wfa184.bin
IB_FMr220_e1wfa185.bin
IB_FMr220_e1wfa186.bin
IB_FMr220_e1wfa187.bin
IB_FMr220_e1wfa188.bin
IB_FMr220_e1wfa190.bin
IB_FMr220_e1wfa194.bin
IB_FMr220_e1wfa195.bin
IB_FMr220_e1wfa196.bin
IB_FMr220_e1wfa197.bin
IB_FMr220_e1wfa204.bin
IB_FMr220_e1wfa205.bin
IB_FMr220_e1wfa206.bin
IB_FMr230a_e1wfa150.bin
IB_FMr230a_e1wfa152.bin
IB_FMr230b_e1wfa151.bin
IB_FMr230b_e1wfa154.bin
IB_FMr230b_e1wfa155.bin
IB_FMr230c_e1wfd104.bin
IB_FMr230d_e1wfd108.bin
IB_FMr230j_e1wfd124.bin
IB_FMr230n_e1wfd304.bin
IB_FMr230_e1wfa210.bin
IB_FMr230_e1wfa211.bin
IB_FMr230_e1wfd308.bin
IB_FMr240b_e1wfa158_nh.bin
IB_FMr240c_e1wfa166_nh.bin
IB_FMr240_e1wfa105_10db.bin
IB_FMr240_e1wfa105_14db.bin
IB_FMr240_e1wfa109_10db.bin
IB_FMr240_e1wfa109_14db.bin
IB_FMr430_e1wfr1070.bin
IB_FMr430_e1wfr1071.bin
IB_FMr430_e1wfr1072.bin
IB_FMr430_e1wfr1073.bin
IB_FMr430_e1wfr1074.bin
IB_FMr430_e1wfr1075.bin
IB_FMr440a_e1wfr1118.bin
mpl_vector1_v3.bin
mpl_vector2.bin
mpl_vector3_v3.bin
mpl_vector4_v5.bin
mpl_vector5.bin
IB_FMr230d_e1bwfr1032.bin
IB_FMr220_e1wfa112.bin
IB_FMr450_e1wfr1531.bin
IB_FMr450_e1wfr1534.bin
IB_FMr500_e1wfr1703.bin

2.3 HD Radio Operation

There are three(3) ways to access(operate) your System

1. Standalone Operation

Connect USB monitor, Keyboard & Mouse to the H/W
Start->All Programs->@Lumantek->>WeiverHDRadio->>WeiverHDRadio exe.

2. Desktop PC or Network Operation

Install WeiverHDRadio program in Notebook/Desktop PC
Start->All Programs->@Lumantek->>WeiverHDRadio->>WeiverHDRadio exe.

3. Front Panel LCD Operation - Refer to the next page.

How to Update WEIVER 2.0 Player System


Connect the WEIVER 2.0 Player to a laptop or desktop PC with both Microsoft Windows OS and the 'WeiverHDRADIO.exe' program installed. In case where system update is necessary, please have a monitor, keyboard and mouse ready.

Visit LUMANTEK online Download Center at <http://www.lumantek.com/support/> to download 'WeiverHDRADIO.exe' program. Double-click on the program icon will initiate the installation.

**** LCD Screen Operation**

Starting WEIVER 2.0 Player – HD Radio Option

The “WeiverHDRADIO.exe” program is for connecting and controlling the Weiver 2.0 player system. You will see a “remote” sign displayed on front LCD panel when the system is being connected.

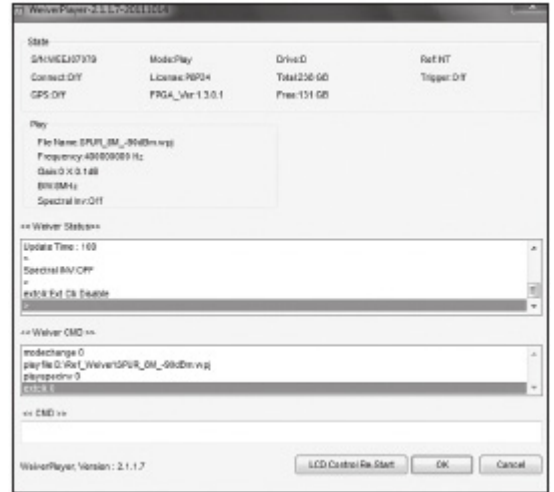


[Play]


● Set --> 1. Play File --> ● Set



--> File Select

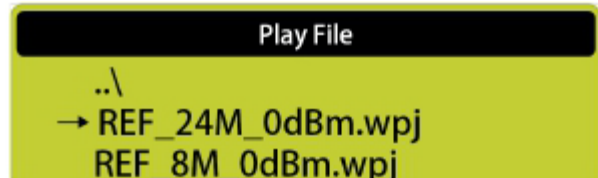

--> ● Set

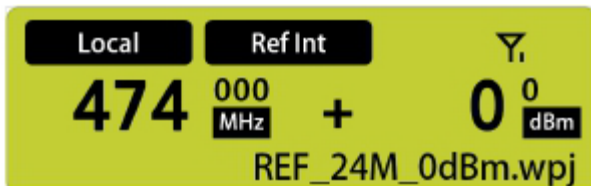

--> ● Play



[Frequency Change]

● Set --> 2. Frequency --> ● Set

1. Play File
→ 2. Frequency
3. Gain
4. Spectrum Inv.

--> Change (up / down / left / right)

Frequency
0400.000000 MHz
[0.1~2700MHz/1Hz]

--> Change (up / down / left / right)

Frequency
0474.000000 MHz
[0.1~2700MHz/1Hz]

● Set --> Esc

Local Ref Int Υ_i
474⁰⁰⁰ MHz + 0⁰ dBm
REF_24M_0dBm.wpj

[Gain Change]

● Set --> 3. Gain --> ● Set

1. Play File
2. Frequency
→ 3. Gain
4. Spectrum Inv.

--> Change (up / down / left / right)

Gain
+00.0 dB
[+30 ~ -30dB/0.1dB]

● Set --> Esc


Local Ref Int Υ_i
474⁰⁰⁰ MHz + 0⁰ dBm
REF_24M_0dBm.wpj

[Spectrum Invert]

● Set --> 4. Spectrum Inv. --> ● Set



--> Change (up / down)

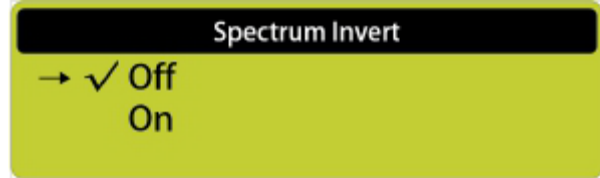


● Set --> Esc




[Reference 10MHz]

● Set --> 5. Ref 10MHz --> ● Set

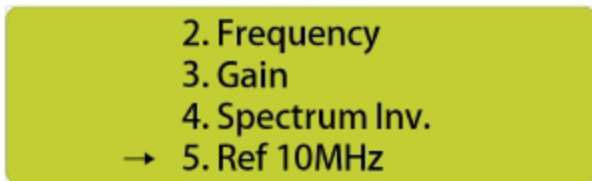

--> Change (up / down)

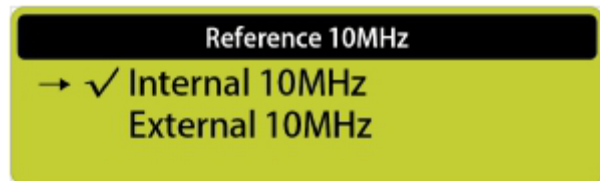


● Set --> Esc



[Rescan Disk]

● Set --> - 6. Rescan Disk --> ● Set

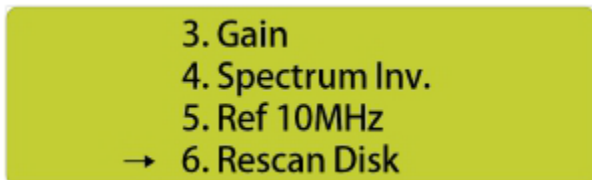

--> Apply / Cancel



● Set --> Esc



[IP Setting]

● Set --> 7. IP Setting --> ● Set

4. Spectrum Inv.
5. Ref 10MHz
6. Rescan Disk
→ 7. IP Setting

--> DHCP

IP Setting
→ DHCP/Static
IP Address
Subnet Mask

Change (up)

DHCP/Static
→ ✓ DHCP
STATIC

--> Static

IP Setting
→ DHCP/Static
IP Address
Subnet Mask

Change (down)

DHCP/Static
→ DHCP
✓ STATIC

--> IP Address

IP Setting
DHCP/Static
→ IP Address
Subnet Mask

--> Address Setting

IP Address
000.000.000.000

--> Subnet Mask

IP Setting
DHCP/Static
IP Address
→ Subnet Mask

--> Subnet Mask Setting

Subnet Mask
000.000.000.000

--> Gateway

IP Setting
IP Address
Subnet Mask
→ Def. Gateway

--> Gateway Setting


Default Gateway
000.000.000.000

--> Apply / Cancel


IP Setting
Def. Gateway
→ Apply
Cancel

[Version]

● Set --> 8.Version --> ● Set

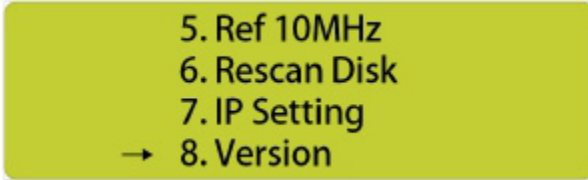

Change (up/down)

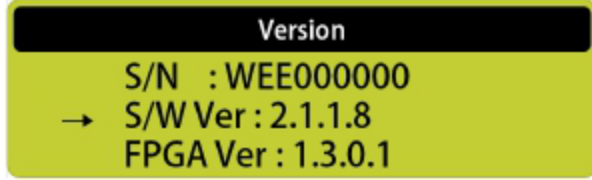


● Set --> Esc




[System Default]

● Set --> 9.System Def. --> ● Set

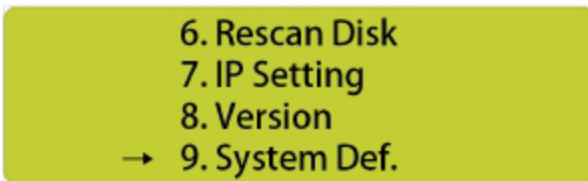


--> Apply / Cancel

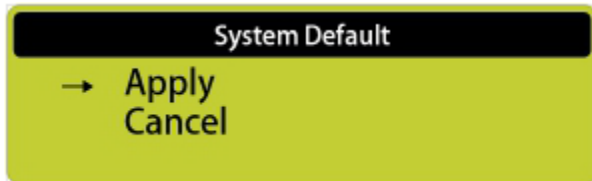

● Set --> Esc




2.4 HD Radio UI

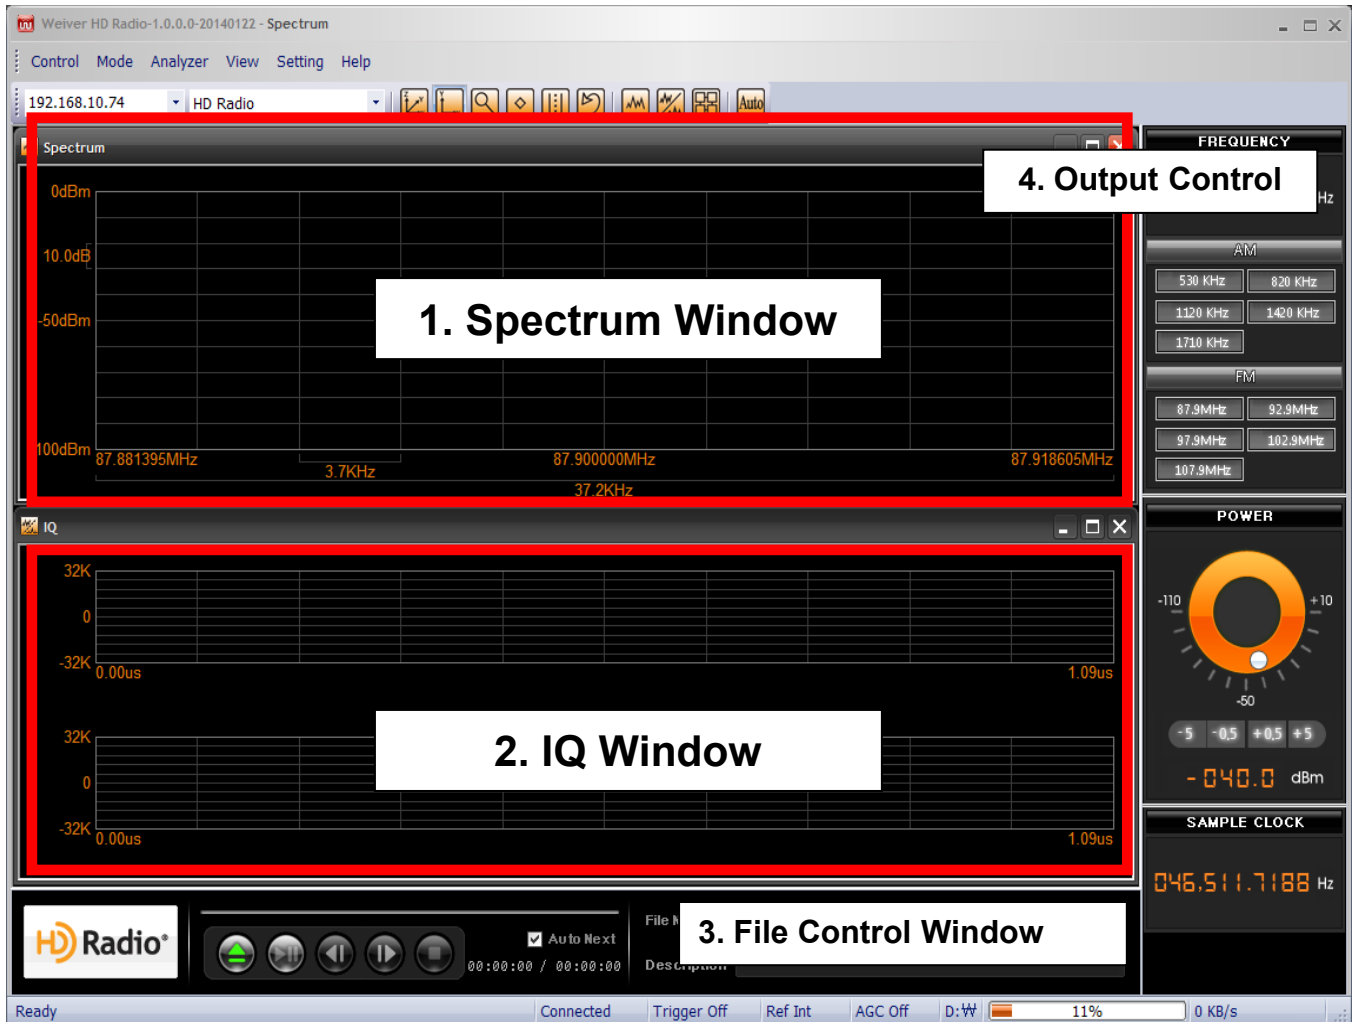


1. Spectrum Window - Showing spectrum of files currently under playback.
2. I/Q Window - Showing I(2Bytes), Q(2Byte) information of files currently under playback
3. File Control Window – showing current file name and description
4. Output Control - Adjust Frequency, Power, and Sample Clock.

2.5 HD Radio screen capture

[2D Mode]

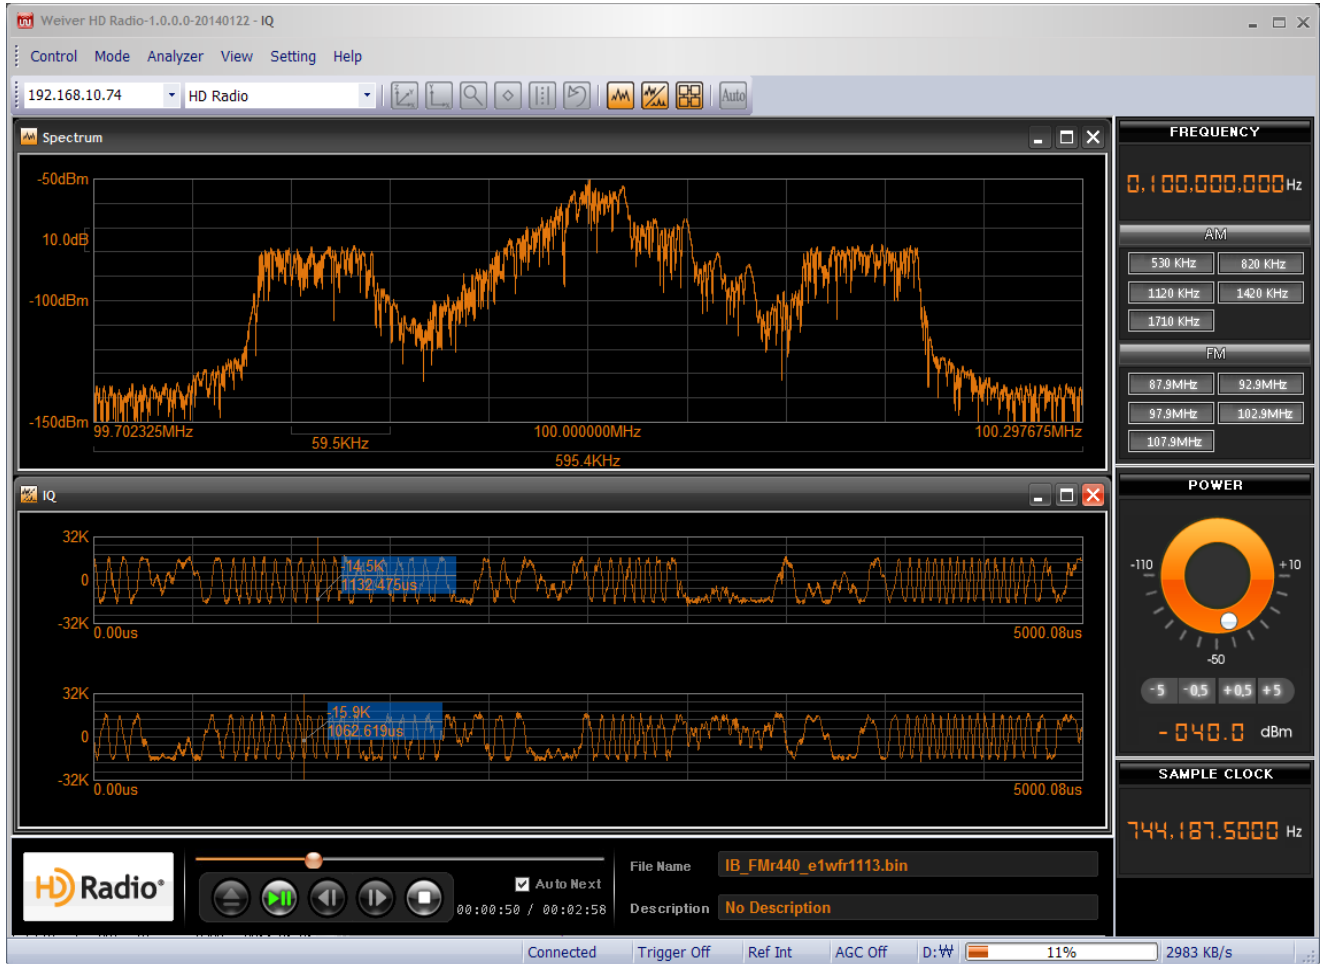


[3D Mode]

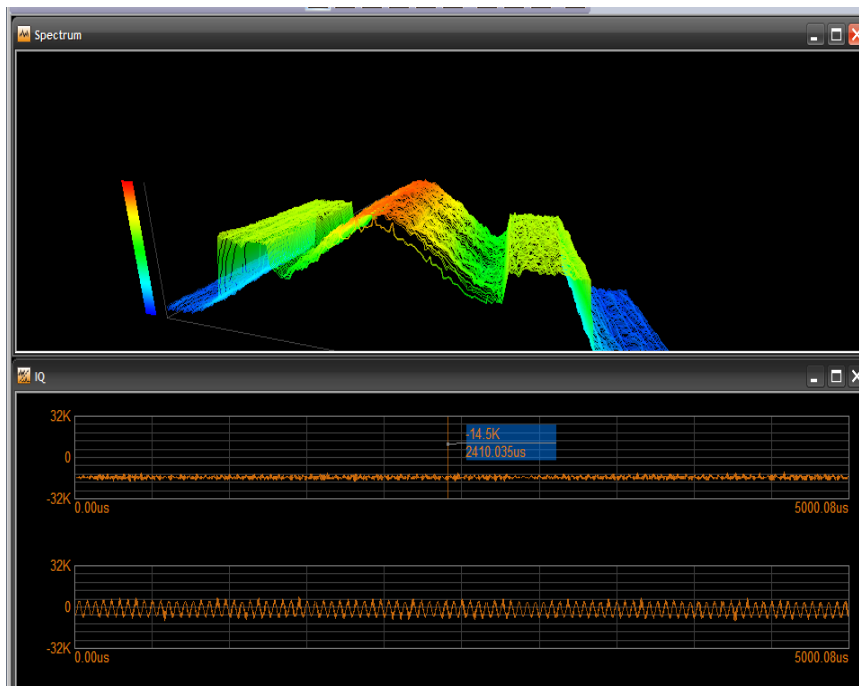

[Markers and Minimum and Maximum]



[Band Power]

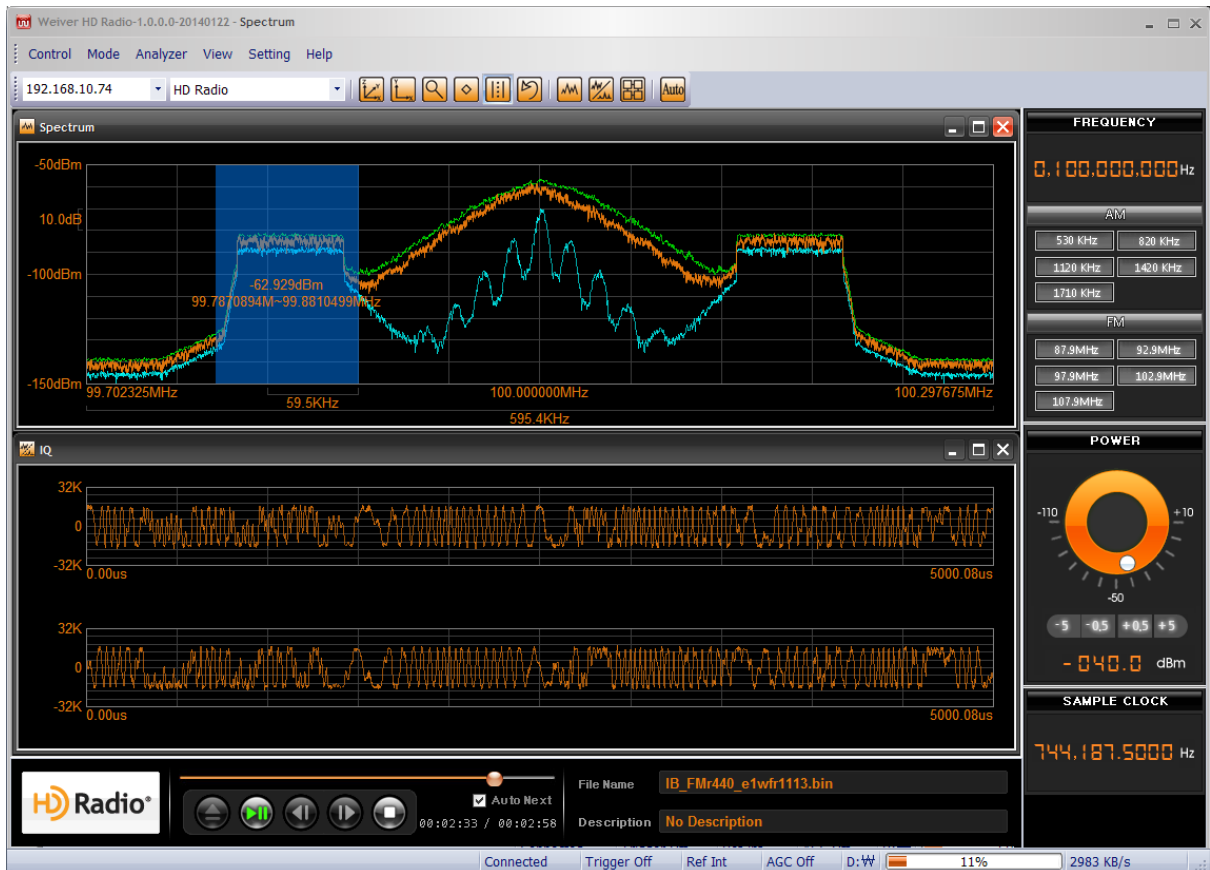

[AM]

Play Folder List

D:\

- HDRadio
 - AM
 - FM
 - WeiverData

File Name	Waveform	File Power(dBm)	Description
<input type="checkbox"/> IB_Amr001_e1_cw_0_m10.bin	AM	-18.1	Two RF carriers; Freqoffset1 = 0 Hz; Freqoffset2 =
<input type="checkbox"/> IB_Amr001_e1_cw_2_6.bin	AM	-18.1	Two RF carriers; Freqoffset1 = +2 kHz; Freqoffset2 =
<input type="checkbox"/> IB_Amr001_e1_cw_m1_m2.bin	AM	-18.1	Two RF carriers; Freqoffset1 = -1 kHz; Freqoffset2 =
<input type="checkbox"/> IB_Amr001_e1_cw_m30_0_30.bin	AM	-19.9	Three RF carriers; Freqoffset1 = -30 kHz; Freqoffs
<input type="checkbox"/> IB_Amr001_e1_cw_m7p5_10.bin	AM	-18.1	Two RF carriers; Freqoffset1 = -7.5 kHz; Freqoffse
<input type="checkbox"/> IB_Amr201_e1awfc52.bin	AM	-21.7	MA1, music, blend control bits change from 01bin
<input type="checkbox"/> IB_Amr208a_e1awfb00.bin	AM	-22.2	MA1, analog source is pulsed USASI NOISE, digit
<input type="checkbox"/> IB_Amr208a_e1awfb138.bin	AM	-22.8	MA1, analog source is pulsed USASI NOISE, BER
<input type="checkbox"/> IB_Amr208a_e1awfc33.bin	AM	-21.3	MA1, stereo digital (left only) / mono analog, 4-kHz
<input type="checkbox"/> IB_Amr208a_e1awfc34.bin	AM	-21.4	MA1, stereo digital (right only) / mono analog, 4-kHz
<input type="checkbox"/> IB_Amr208c_e1awfa11.bin	AM	-21.6	MA1 audio mix, signal alternates between the foll
<input type="checkbox"/> IB_Amr208_e1awfa05.bin	AM	-22.1	MA1, audio mix, clean channel
<input type="checkbox"/> IB_Amr208_e1awfa07.bin	AM	-32.9	MA3, audio mix, clean channel
<input type="checkbox"/> IB_Amr208_e1awfa10.bin	AM	-20.7	MA1, AWGN audio source, clean channel
<input type="checkbox"/> IB_Amr208_e1awfb01.bin	AM	-31.8	MA3, BER test pattern, clean channel
<input type="checkbox"/> IB_Amr208_e1awfb02.bin	AM	-26.6	MA1, BER test pattern, GCS(triple highway overpa
<input type="checkbox"/> IB_Amr208_e1awfb03.bin	AM	-27.8	MA1, BER test pattern, GCS (double highway over
<input type="checkbox"/> IB_Amr208_e1awfb04.bin	AM	-32.8	MA3, BER test pattern, GCS (double highway over
<input type="checkbox"/> IB_Amr208_e1awfb05.bin	AM	-36.0	MA3, BER test pattern, GCS (highway overpass, s
<input type="checkbox"/> IB_Amr208_e1awfb102.bin	AM	-22.9	MA1, analog source is pulsed USASI NOISE, BER
<input type="checkbox"/> IB_Amr208_e1awfb104.bin	AM	-22.8	MA1, analog source is pulsed USASI NOISE, BER
<input type="checkbox"/> IB_Amr208_e1awfb111.bin	AM	-22.6	MA1, analog source is pulsed USASI NOISE, BER
<input type="checkbox"/> IB_Amr208_e1awfb113.bin	AM	-22.6	MA1, analog source is pulsed USASI NOISE, BER
<input type="checkbox"/> IB_Amr208_e1awfb119.bin	AM	-33.2	MA3, BER test pattern, C/No = 50 dB-Hz
<input type="checkbox"/> IB_Amr208_e1awfb121.bin	AM	-33.0	MA3, BER test pattern, C/No = 52 dB-Hz
<input type="checkbox"/> IB_Amr208_e1awfb124.bin	AM	-32.2	MA3, BER test pattern, C/No = 63 dB-Hz
<input type="checkbox"/> IB_Amr208_e1awfb126.bin	AM	-32.2	MA3, BER test pattern, C/No = 65 dB-Hz
<input type="checkbox"/> IB_Amr208_e1awfb128.bin	AM	-32.1	MA3, BER test pattern, C/No = 67 dB-Hz
<input type="checkbox"/> IB_Amr208_e1awfb130.bin	AM	-32.3	MA3, BER test pattern, C/No = 61 dB-Hz
<input type="checkbox"/> IB_Amr208_e1awfb131.bin	AM	-22.9	MA1, analog source is pulsed USASI NOISE, BER
<input type="checkbox"/> IB_Amr208_e1awfb132.bin	AM	-21.9	MA1, analog source is pulsed USASI NOISE, BER
<input type="checkbox"/> IB_Amr208_e1awfb134.bin	AM	-22.5	MA1, analog source is pulsed USASI NOISE, BER
<input type="checkbox"/> IB_Amr208_e1awfb135.bin	AM	-23.4	MA1, analog source is pulsed USASI NOISE, BER
<input type="checkbox"/> IB_Amr208_e1awfb145.bin	AM	-32.3	MA3, BER test pattern, C/No = 90 dB-Hz, hybrid lo
<input type="checkbox"/> IB_Amr208_e1awfb243.bin	AM	-32.5	MA3, BER test pattern, C/No = 90 dB-Hz, hybrid up
<input type="checkbox"/> IB_Amr208_e1awfc00.bin	AM	-21.9	MA1, stereo digital / mono analog, pulsed 125-Hz
<input type="checkbox"/> IB_Amr208_e1awfc04.bin	AM	-21.6	MA1, stereo digital / mono analog, 2.5-kHz bi-leve
<input type="checkbox"/> IB_Amr208_e1awfc06.bin	AM	-21.3	MA1, stereo music, clean channel
<input type="checkbox"/> IB_Amr208_e1awfc08.bin	AM	-21.5	MA1, stereo digital / mono analog, 1-kHz tone with
<input type="checkbox"/> IB_Amr208_e1awfc10.bin	AM	-21.4	MA1, 1-kHz tone (left channel only), clean channel
<input type="checkbox"/> IB_Amr208_e1awfc11.bin	AM	-21.4	MA1, 1-kHz tone (right channel only), clean chann

[FM]

Play Folder List

D:\

- HDRadio
 - AM
 - FM
 - WeiverData

File Name	Waveform	File Power(dBm)	Description
<input type="checkbox"/> CC_Fmr430b_e1wfr0001.bin	FM	-15.4	Journaline® / HD-TMC
<input type="checkbox"/> IB_Fmr001_e1_cw_0_100.bin	FM	-15.4	Two RF carriers; Freqoffset1 = 0 Hz; Freqoffset2 =
<input type="checkbox"/> IB_Fmr001_e1_cw_0_m100.bin	FM	-15.4	Two RF carriers; Freqoffset1 = 0 Hz; Freqoffset2 =
<input type="checkbox"/> IB_Fmr001_e1_cw_0_m200.bin	FM	-15.4	Two RF carriers; Freqoffset1 = 0 Hz; Freqoffset2 =
<input type="checkbox"/> IB_Fmr001_e1_cw_10_20.bin	FM	-15.4	Two RF carriers; Freqoffset1 = +10 kHz; Freqoffse
<input type="checkbox"/> IB_Fmr001_e1_cw_50_100.bin	FM	-15.4	Two RF carriers; Freqoffset1 = +50 kHz; Freqoffse
<input type="checkbox"/> IB_Fmr001_e1_cw_m275_0_275.bin	FM	-17.2	Three RF carriers; Freqoffset1 = -275 kHz; Freqoff
<input type="checkbox"/> IB_Fmr001_e1_cw_m50_0.bin	FM	-15.4	Two RF carriers; Freqoffset1 = -50 kHz; Freqoffse
<input type="checkbox"/> IB_Fmr001_e1_cw_m80_m90.bin	FM	-15.4	Two RF carriers; Freqoffset1 = -80 kHz; Freqoffse
<input type="checkbox"/> IB_Fmr201_e1wfc52.bin	FM	-14.1	MP1, music, blend control bits change from 01bin
<input type="checkbox"/> IB_Fmr208c_e1wfa05.bin	FM	-14.1	MP1, audio mix, clean channel
<input type="checkbox"/> IB_Fmr208c_e1wfa25.bin	FM	-19.6	MP6, audio mix, clean channel
<input type="checkbox"/> IB_Fmr208c_e1wfa98.bin	FM	-15.8	Modulated analog FM only, continuous stereo 1-kHz
<input type="checkbox"/> IB_Fmr208c_e1wfa99.bin	FM	-12.4	Modulated analog FM only, stereo music, clean ch
<input type="checkbox"/> IB_Fmr208c_e1wfc00.bin	FM	-14.1	MP1, stereo pulsed 125-Hz tone (active 0.37 seco
<input type="checkbox"/> IB_Fmr208c_e1wfc03.bin	FM	-14.1	MP1, stereo 4-kHz bi-level tone with calibrated an
<input type="checkbox"/> IB_Fmr208c_e1wfc08.bin	FM	-14.0	MP1, stereo 1-kHz tone with calibrated analog an
<input type="checkbox"/> IB_Fmr208c_e1wfc09.bin	FM	-14.1	MP1, 1-kHz tone (left channel only), clean channel
<input type="checkbox"/> IB_Fmr208c_e1wfc10.bin	FM	-14.1	MP1, 1-kHz tone (right channel only), clean chann
<input type="checkbox"/> IB_Fmr208c_e1wfc201.bin	FM	-17.5	MP1, analog source is audio mix, BER test pattern
<input type="checkbox"/> IB_Fmr208c_e1wfc203.bin	FM	-16.7	MP1, analog source is audio mix, BER test pattern
<input type="checkbox"/> IB_Fmr208c_e1wfc204.bin	FM	-14.1	MP1, analog source is audio mix, BER test pattern
<input type="checkbox"/> IB_Fmr208c_e1wfc206.bin	FM	-26.3	MP1, analog source is audio mix, BER test pattern
<input type="checkbox"/> IB_Fmr208c_e1wfc209.bin	FM	-26.5	MP1, analog source is audio mix, BER test pattern
<input type="checkbox"/> IB_Fmr208c_e1wfc210.bin	FM	-17.6	MP1, BER test pattern
<input type="checkbox"/> IB_Fmr208c_e1wfc211.bin	FM	-17.5	MP1, analog source is audio mix, BER test pattern
<input type="checkbox"/> IB_Fmr208c_e1wfc227.bin	FM	-28.8	MP1, analog source is audio mix, BER test pattern
<input type="checkbox"/> IB_Fmr208c_e1wfc230.bin	FM	-29.0	MP1, analog source is audio mix, BER test pattern
<input type="checkbox"/> IB_Fmr208c_e1wfc27.bin	FM	-14.1	MP1, stereo 1-kHz tone with calibrated analog an
<input type="checkbox"/> IB_Fmr208c_e1wfc28.bin	FM	-14.0	MP1, stereo 1-kHz tone with calibrated analog an
<input type="checkbox"/> IB_Fmr208c_e1wfc30.bin	FM	-14.1	MP1, analog audio is silence, digital audio is 1 k-
<input type="checkbox"/> IB_Fmr208c_e1wfc46.bin	FM	-19.3	MP6, BER test pattern, clean channel
<input type="checkbox"/> IB_Fmr208c_e1wfc546.bin	FM	-29.0	MP5, BER test pattern, Cd/No = 56 dB-Hz, urban f.
<input type="checkbox"/> IB_Fmr208c_e1wfc547.bin	FM	-29.6	MP5, BER test pattern, Cd/No = 57 dB-Hz, urban f.
<input type="checkbox"/> IB_Fmr208c_e1wfc548.bin	FM	-30.4	MP5, BER test pattern, Cd/No = 59 dB-Hz, urban f.
<input type="checkbox"/> IB_Fmr208c_e1wfc90.bin	FM	-16.7	MP1; Analog audio is silence, digital audio is 1-kHz
<input type="checkbox"/> IB_Fmr208d_e1wfa141.bin	FM	-14.7	MP1, 3 programs; Prog 1: on P1, rate changes, 52
<input type="checkbox"/> IB_Fmr208d_e1wfc208.bin	FM	-26.5	MP1, analog source is audio mix, BER test pattern
<input type="checkbox"/> IB_Fmr208d_e1wfc538.bin	FM	-24.9	MP5, BER test pattern, Cd/No = 53 dB-Hz
<input type="checkbox"/> IB_Fmr208d_e1wfc540.bin	FM	-24.9	MP5, BER test pattern, Cd/No = 53 dB-Hz
<input type="checkbox"/> IB_Fmr208d_e1wfc542.bin	FM	-24.9	MP5, BER test pattern, Cd/No = 57 dB-Hz
<input type="checkbox"/> IB_Fmr208d_e1wfc549.bin	FM	-30.7	MP5, BER test pattern, Cd/No = 60 dB-Hz, urban f.

Update Open Files


2.6 HD Radio Setting

- [Weiver HD Radio Frequency Setting]

Adjustable Range : 100KHz ~ 200MHz

How to Change

- Click on the number section, adjust the frequency with mouse wheel or keyboard arrow buttons
- Click on pre-selected AM, FM Frequency icon

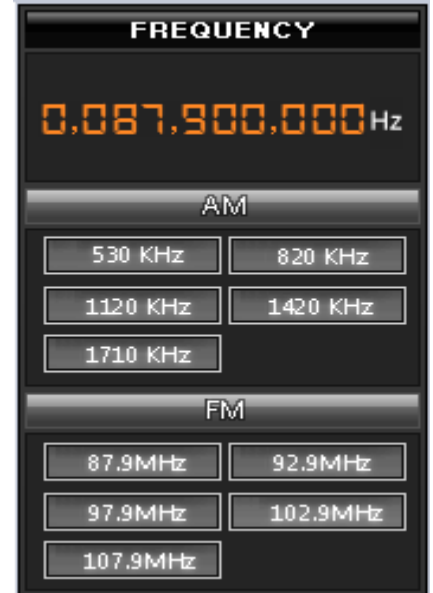

- [Weiver HD Radio Power Setting]

Adjustable Range : -110dBm~+10dBm

It depend on the power level of each AM/FM Vector files which have different Max/Min level. Max(+10dBm)/Min (-110dBm) may not be applicable to some of the files

How to Change

- Click on the number section, adjust the power level with mouse wheel or keyboard arrow buttons
- Click on the White button on UI and scroll
- Click on pre-selected ranges, -5, -0.5, +0.5, +5



- [Weiver HD Radio Sample Clock Setting]

AM/FM Default Sample Clock

AM: 46511.7188 Hz

FM: 744187.5 Hz

Adjustable Range

AM: 46558.2305 Hz~46558.2305 Hz

FM: 743443.3125 Hz~744931.6875 Hz

How to Change

Click on the number section, adjust the with mouse wheel or keyboard arrow buttons



WEIVER 2.0 / WEIVER Player API for HD Radio Vector Signal Generator

- Summary

There are Three (3) ways to control both Weiver & WeiverPlayer

1. with keypad control for 'WeiverPlayer'
2. with 'WeiverEx' Software
3. with 'API'

#1 and #2 above are the general control method,

#3 is to control the system with command via UDP packet.

API control is supported for 'Weiver 1.0', 'Weiver Player 1.0', 'Weiver 2.0' and 'Weiver Player 2.0'

Supported in 'Playback' mode ONLY. (Not supported for 'Recording')

HD Radio™ is supported with 'Weiver 2.0' and 'Weiver Player 2.0' system ONLY.

3.1 Principle of Weiver/ WeiverPlayer API

‘WeiverEx’ software connects with ‘Weiver/ WeiverPlayer’ software via IP, control the system with UDP packets. Since the main purpose of utilizing the API is to control the ‘Weiver/ WeiverPlayer’ system without the ‘WeiverEx’ program, this documentation will open sample API programs with its packet data information.

You may download reference sources on Lumantek website at www.lumantek.com

Following is the API packet structure for ‘Weiver/WeiverPlayer’. (Reference: WvPlayerRemoteAPI.h)

```
#define WEIVER_PLAYER_ID 0x057b50b7
#define WEIVER_PLAYER_API_RX_PORT 50504

#define REMOTE_STRING_SUCCESS_T("Received")
#define REMOTE_STRING_INVALIDE_PARAM_T("Invalid Param")

typedef enum _WvPlayerRemoteCMD_e
{
    WV_PLAYER_REMOTE_CMD_SET_STRING,
    WV_PLAYER_REMOTE_CMD_MAX
}WvPlayerRemoteCMD_t;

typedef struct _WvPlayerRemotePacket_t
{
    unsigned int u4_ID;// WEIVER_PLAYER_ID
    unsigned int u4_Reserved;//WV_PLAYER_REMOTE_CMD_SET_STRING
    unsigned int u4_DataSize;
    unsigned char u1a_Data[1000];
}WvPlayerRemotePacket_t, *WvPlayerRemotePacket_tp;
```

UDP port: 50504 is left open to support API with ‘Weiver/WeiverPlayer’.
The ‘Weiver/Weiverplayer’ executes certain commands when the ‘WvPlayerRemotePacket’ structure data is received.

The opened ‘Source’ is the sample window programs. (May applicable to the other types of the OS)

Before moving into the command list description, the sample program ‘WeiverPlayerRemoteAPI.exe’ uses following five (5) assumptions.

- Assumption 1: IP address for ‘Weiver/WeiverPlayer’ is 192.168.100.1.
- Assumption 2: Port left open for API support ‘Weiver/WeiverPlayer’ is 50504 (fixed)
- Assumption 3: Port left open for UDP reception is 50000. (Vary)
- Assumption 4: Each characters have 2byte in its size.
- Assumption 5: The ‘Time Out’ will occur if UDP gets no response after its transmission.

3.2 Data Packet Structure

‘WeiverEx’ software connects with ‘Weiver/ WeiverPlayer’ software via IP, control the system with UDP packets. Since the main purpose of utilizing the API is to control the ‘Weiver/ WeiverPlayer’ system without the ‘WeiverEx’ program, this documentation will open sample API programs with its packet data information.

connect 50000

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	26	L"connect 50000"
Size(Byte)	4	4	4	13x2

disconnect

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	20	L"disconnect"
Size(Byte)	4	4	4	10x2

rescandisk

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	20	L"rescandisk"
Size(Byte)	4	4	4	10x2

openfile test.wpj

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	34	L"openfile test.wpj"
Size(Byte)	4	4	4	17x2

get openfile

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	24	L"get openfile"
Size(Byte)	4	4	4	12x2

play start

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	20	L"play start"
Size(Byte)	4	4	4	10x2

play stop

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	18	L"play stop"
Size(Byte)	4	4	4	9x2

play pause

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	20	L"play pause"
Size(Byte)	4	4	4	10x2

play resume

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	22	L" play resume"
Size(Byte)	4	4	4	11x2

get play_status

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	30	L"get play_status"
Size(Byte)	4	4	4	15x2

set freq 400000000

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	36	L"set freq 400000000"
Size(Byte)	4	4	4	18x2

set freq 400000000 hz

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	42	L"set freq 400000000 hz"
Size(Byte)	4	4	4	21x2

set freq 400000 khz

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	38	L"set freq 400000 khz"
Size(Byte)	4	4	4	19x2

set freq 400 mhz

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	32	L"set freq 400 mhz"
Size(Byte)	4	4	4	16x2

get freq

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	16	L"get freq"
Size(Byte)	4	4	4	8x2

get gain_min

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	24	L"get gain_min"
Size(Byte)	4	4	4	12x2

get gain_max

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	24	L"get gain_max"
Size(Byte)	4	4	4	12x2

get gain

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	16	L"get gain"
Size(Byte)	4	4	4	8x2

get rf_out_level 1

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	36	L"get rf_out_level 1"
Size(Byte)	4	4	4	18x2

set gain 100

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	24	L"set gain 100"
Size(Byte)	4	4	4	12x2

set gain -100

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	26	L"set gain -100"
Size(Byte)	4	4	4	13x2

get play_time_total

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	38	L"get play_time_total"
Size(Byte)	4	4	4	19x2

get play_time_current

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	42	L"get play_time_current"
Size(Byte)	4	4	4	21x2

set play_time_current 5

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	46	L"set play_time_current 5"
Size(Byte)	4	4	4	23x2

get play_section

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	32	L"get play_section"
Size(Byte)	4	4	4	16x2

set play_section 10 20

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	44	L"set play_section 10 20"
Size(Byte)	4	4	4	22x2

get spec_inv

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	24	L"get spec_inv"
Size(Byte)	4	4	4	12x2

set spec_inv off

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	32	L"set spec_inv off"
Size(Byte)	4	4	4	16x2

set spec_inv on

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	30	L"set spec_inv on"
Size(Byte)	4	4	4	15x2

get sample_rate

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	30	L"get sample_rate"
Size(Byte)	4	4	4	15x2

set sample_rate 10000000

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	48	L"set sample_rate 10000000"
Size(Byte)	4	4	4	24x2

set sample_rate 10000000 hz

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	54	L"set sample_rate 10000000 hz"
Size(Byte)	4	4	4	27x2

set sample_rate 10 mhz

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	44	L"set sample_rate 10 mhz"
Size(Byte)	4	4	4	22x2

set sample_rate 10000 khz

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	54	L"set sample_rate 10000 khz"
Size(Byte)	4	4	4	27x2

set trigger_out_level low

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	50	L"set trigger_out_level low"
Size(Byte)	4	4	4	25x2

set trigger_out_level high

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	52	L"set trigger_out_level low"
Size(Byte)	4	4	4	26x2

get trigger_out_level

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	42	L"get trigger_out_level"
Size(Byte)	4	4	4	21x2

set extclk off

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	28	L"set extclk off"
Size(Byte)	4	4	4	14x2

set extclk on

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	26	L"set extclk on"
Size(Byte)	4	4	4	13x2

get extclk

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	20	L"get extclk"
Size(Byte)	4	4	4	10x2

get trigger_in

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	28	L"get trigger_in"
Size(Byte)	4	4	4	14x2

set trigger_in off

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	36	L"set trigger_in off"
Size(Byte)	4	4	4	18x2

set trigger_in on

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	34	L"set trigger_in on"
Size(Byte)	4	4	4	17x2

set current_directory d:\

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	50	L"set current_directory d:\"
Size(Byte)	4	4	4	25x2

set current_directory d:\WeiverData

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	70	L"set current_directory d:\WeiverData"
Size(Byte)	4	4	4	35x2

get current_directory

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	42	L"get current_directory"
Size(Byte)	4	4	4	21x2

get file_count

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	28	L"get file_count"
Size(Byte)	4	4	4	14x2

get filename 0

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	28	L"get filename 0"
Size(Byte)	4	4	4	14x2

get folder_count

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	32	L"get folder_count"
Size(Byte)	4	4	4	16x2

get foldername 0

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	32	L"get foldername 0"
Size(Byte)	4	4	4	16x2

set power -200

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	28	L"set power -200"
Size(Byte)	4	4	4	14x2

get power

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	18	L"get power"
Size(Byte)	4	4	4	9x2

get power_min

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	26	L"get power_min"
Size(Byte)	4	4	4	13x2

get power_max

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	26	L"get power_max"
Size(Byte)	4	4	4	13x2

get freq_min

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	24	L"get freq_min"
Size(Byte)	4	4	4	12x2

get freq_max

Type	ID	Reserved	Data Size	Data
Data	0x057b50b7	0	24	L"get freq_max"
Size(Byte)	4	4	4	12x2

3.3 Command

Command	connect <parameter>
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	To connect with the device <Parameter> temporary port number. Ex) To send the response from Weiver system, 'connect 50000' command sends UDP packets to the 50000 port. If the System is being controlled by either 'WeiverEx' or 'HD Radio™ S/W', the 'connect' command will fail. When 'connect' command fails, it transmits 'connect' command after sending 'disconnect' command first. The temporarily opened port number information must be saved.

Command	Disconnect
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Command disconnecting from the device. RF transmission will be terminated automatically.

Command	rescandisk
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Rescanning the disk drive connected to the device.

Command	openfile <parameter>
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	<p>Open (select) the file for the playback. <Parameter> is a sample (temporary) file name. Move to the folder where the playback file is located before executing 'openfile' command. Please refer to 'set current_directory' for folder location commands 'openfile' fails if the system is under 'play' status. To stop 'play', please refer the commands list for 'play'. For Weiver file, it automatically configures (sets) center frequency and power level at the time of recording. Please refer to the 'set freq' and 'set gain' commands list to adjust center frequency and power level of the Weiver file. For HD Radio™ FM file, it automatically configures (sets) frequency at 87.9MHz, power level at its distinct level. For HD Radio™ AM file, it automatically configures (sets) frequency 830KHz, power level at its distinct level. Please refer to the 'set freq' and 'set power' commands list for HD Radio™ file center frequency and power level adjustment.</p>

Command	get openfile
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Get information of file names that is currently being opened.

Command	play start play stop play pause play resume
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	<p>play start : Start RF Transmission. play stop : Stop RF Transmission. play pause : Pause RF Transmission. play resume : Resume RF Transmission. Use 'play' commands after entering 'openfile' commands.</p>

Command	get play_status
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Get status information of 'play'.

Command	set freq <parameter> set freq <parameter> hz set freq <parameter> khz set freq <parameter> mhz
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Set the frequency of the device. <parameter> is temporary(sample) frequency. No specific adjustment is necessary since 'openfile' commands automatically configures its sample and center frequency. Use 'set freq' commands to configure frequency for 'HD Radio™' file, the frequency automatically sets at 87.9MHz for FM and 830KHz for AM respectively.
Command	get freq
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Get the frequency information of the device.

Command	set gain <parameter>
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : X
Description	Commands for adjusting the RF transmission power of the device. <parameter> is a temporary(sample) gain value. <parameter> is 100 when +10.0 dB gain is applied. <parameter> is -123 when -12.3 dB gain is applied. HD Radio™ files NOT supported. Please refer to the 'set power' command list for HD Radio™ files.

Command	get gain get gain_min get gain_max
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : X
Description	get gain : get gain information of the RF transmission. get gain_min : get the minimum gain information of the RF transmission. get gain_max : get the maximum gain information of the RF transmission. It is -12.3 dB when gain information is -123. HD Radio™ files NOT supported Please refer to the 'set power' command for HD Radio™ files.

Command	get rf_out_level <parameter>
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : X
Description	Get information of RF output power. <parameter> is a temporary(sample) time value (in seconds). The time value must be less than its total time. It is -12.3 dB when gain information is -123. Please refer to 'get play_time_total' commands for total time of the file. HD Radio™ files NOT supported Please refer to the 'get power' command list for HD Radio™ files.

Command	set play_time_current <parameter>
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Command configures (sets) the starting point of the 'play' file by seconds. <parameter> is a temporary(sample) time value (in seconds).

Command	get play_time_total get play_time_current
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	get play_time_total : get information of the file size that is currently being played by its seconds. get play_time_current : get information of the file location that is currently being played by its seconds.

Command	set play_section <parameter1> <parameter2>
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : X
Description	Command configure (sets) the 'Loop' playback function. <parameter1> is temporary (sample) loop starting point time (in seconds) value. <parameter2> is temporary (sample) loop ending point time (in seconds) value.

Command	get play_section
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : X
Description	Get time value information of loop segments.

Command	set spec_inv off set spec_inv on
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
description	set spec_inv off : transmission without inverse. (left/right) set spec_inv on : transmission with inverse. (left/right)

Command	get spec_inv
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	get spec_inv : get information of spectrum inverse value.

Command	set sample_rate <parameter> set sample_rate <parameter> hz set sample_rate <parameter> khz set sample_rate <parameter> mhz
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : X
Description	Command for sample frequency adjustment. <parameter> is a temporary(sample) frequency. 'openfile' command automatically configures (sets) center frequency and power level at the time of recording. NO specific adjustment necessary.

Command	get sample_rate
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : X
Description	Get information of the sample frequency.

Command	set trigger_out_level low set trigger_out_level high get trigger_out_level
Support	Weiver 1.0 : X Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Command for output control of 'Trigger Out' port. set trigger_out_level low : Low Level(0V) output. set trigger_out_level high : High Level(3.3V) output. get trigger_out_level : Get information on status of 'Trigger Out' port.

Command	set extclk off set extclk on get extclk
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Command for configuration of external/internal 10MHz synchronization. set extclk off : Use internal 10MHz. set extclk on : Use external 10MHz. get extclk : Get information on status of 10MHz sync status.

Command	set trigger_in off set trigger_in on get trigger_in
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Operation control command for number of devices by output level of 'Trigger In Port'. set trigger_in off : Operates regardless of 'Trigger In Port' input level. set trigger_in on : Operates only when 'Trigger In Port' Level is High(3.3v) get trigger_in : Get information on status of operation based on sync status.

Command	set current_directory <parameter>
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Command for designate the folder where the device file is located. <parameter> is absolute path name of the folder. Please change the folder before using 'openfile' command.

Command	get current_directory
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Get information on current device folder.

Command	get file_count
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Get information on number of Weiver and HD Radio™ files in current device.

Command	get filename <parameter>
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Get information on file names of Weiver and HD Radio™ of appropriate index among retrieved file list of current device folder. <parameter> Designate Index of the file list. The value of Index must be less than value of 'get file_count' command.

Command	get folder_count
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Change the number of sub-folders in device folder.

Command	get foldername <parameter>
Support	Weiver 1.0 : O Weiver Player 1.0 : O Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	Get information on name of sub-folders in current device folder. <parameter> Designate Index of the folder. The value of Index must be less than value of 'get folder_count' command.

Command	set power <parameter>
Support	Weiver 1.0 : X Weiver Player 1.0 : X Weiver 2.0 : X Weiver Player 2.0 : X HD Radio™ : O
Description	Command for HD Radio™ RF transmission power control. <parameter> is a temporary(sample) value. <parameter> is -205 when power -20.5 dBm is applied. <parameter> is -432 when gain -43.2 dBm is applied.


Command	get power get power_min get power_max
Support	Weiver 1.0 : X Weiver Player 1.0 : X Weiver 2.0 : X Weiver Player 2.0 : X HD Radio™ : O
Description	get power : get information on HD Radio™ RF transmission power. get power_min : get information on the min. HD Radio™ RF transmission power. get power_max : get information on the max. HD Radio™ RF transmission power. Transmission power is -20.5 dBm when return value is -205. Transmission power is -43.2 dBm when return value is -423.

Command	get freq_min get freq_max
Support	Weiver 1.0 : X Weiver Player 1.0 : X Weiver 2.0 : O Weiver Player 2.0 : O HD Radio™ : O
Description	get freq_min : get the information on minimum frequency value of the device. get freq_max : get the information on maximum frequency value of the device.

3.4 Example

[Example: Play Weiver file]

```
connect 50000
set current_directory D:\WeiverData\Record\File
openfile lumantek-drivingtest-tdmb-agcon.wpj
play start
```

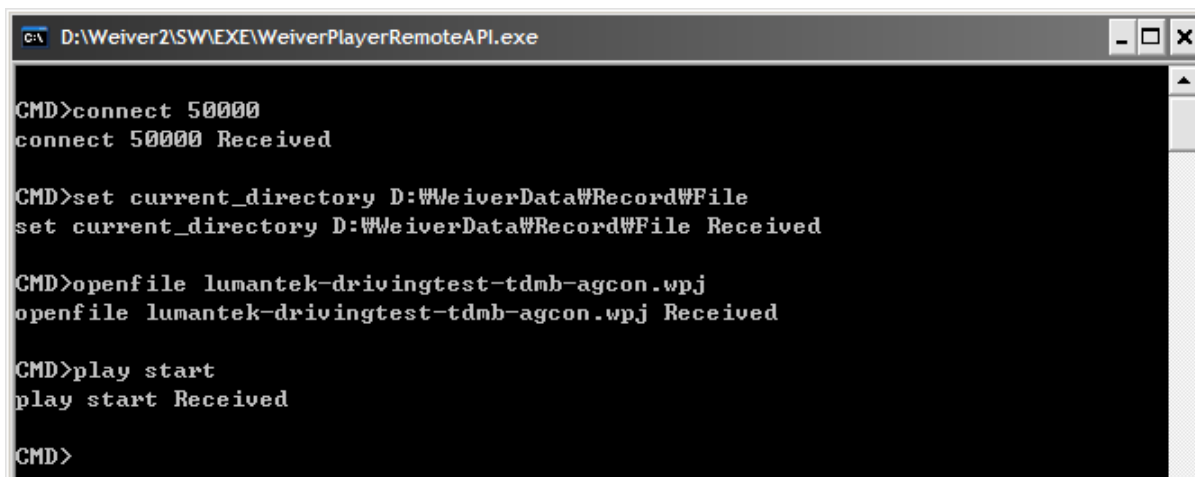

```
C:\D:\Weiver2\SW\EXE>WeiverPlayerRemoteAPI.exe
CMD>connect 50000
connect 50000 Received

CMD>set current_directory D:\WeiverData\Record\File
set current_directory D:\WeiverData\Record\File Received


CMD>openfile lumantek-drivingtest-tdmb-agcon.wpj
openfile lumantek-drivingtest-tdmb-agcon.wpj Received

CMD>play start
play start Received

CMD>
```

[Example: Play HD Radio™ FM file]

```
connect 50000
set current_directory D:\WeiverData\Record\File
openfile CC_FMr440d_e1wfr013.bin
set freq 92900000
set power -300
play start
```

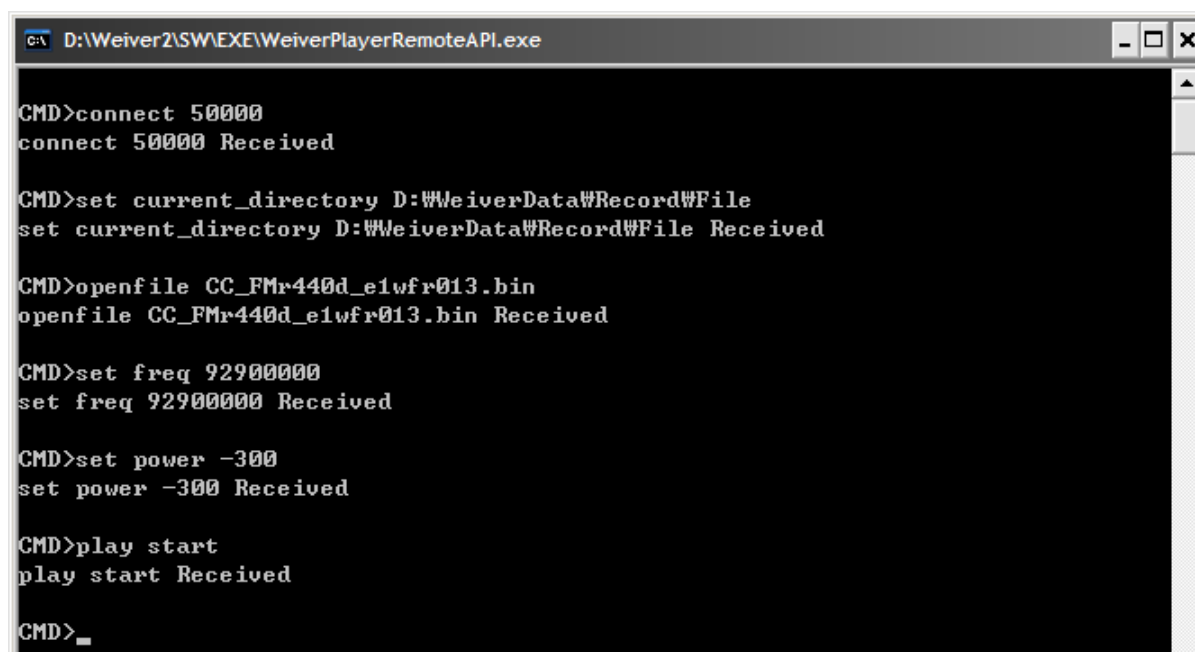

```
C:\D:\Weiver2\SW\EXE>WeiverPlayerRemoteAPI.exe
CMD>connect 50000
connect 50000 Received

CMD>set current_directory D:\WeiverData\Record\File
set current_directory D:\WeiverData\Record\File Received

CMD>openfile CC_FMr440d_e1wfr013.bin
openfile CC_FMr440d_e1wfr013.bin Received

CMD>set freq 92900000
set freq 92900000 Received


CMD>set power -300
set power -300 Received

CMD>play start
play start Received

CMD>_
```

[Example : Play HD Radio™ AM files]

```
connect 50000
set current_directory D:\WeiverData\Record\File
openfile IB_AMr208c_e1awfa11.bin
set freq 820000
set power -300
play start
```

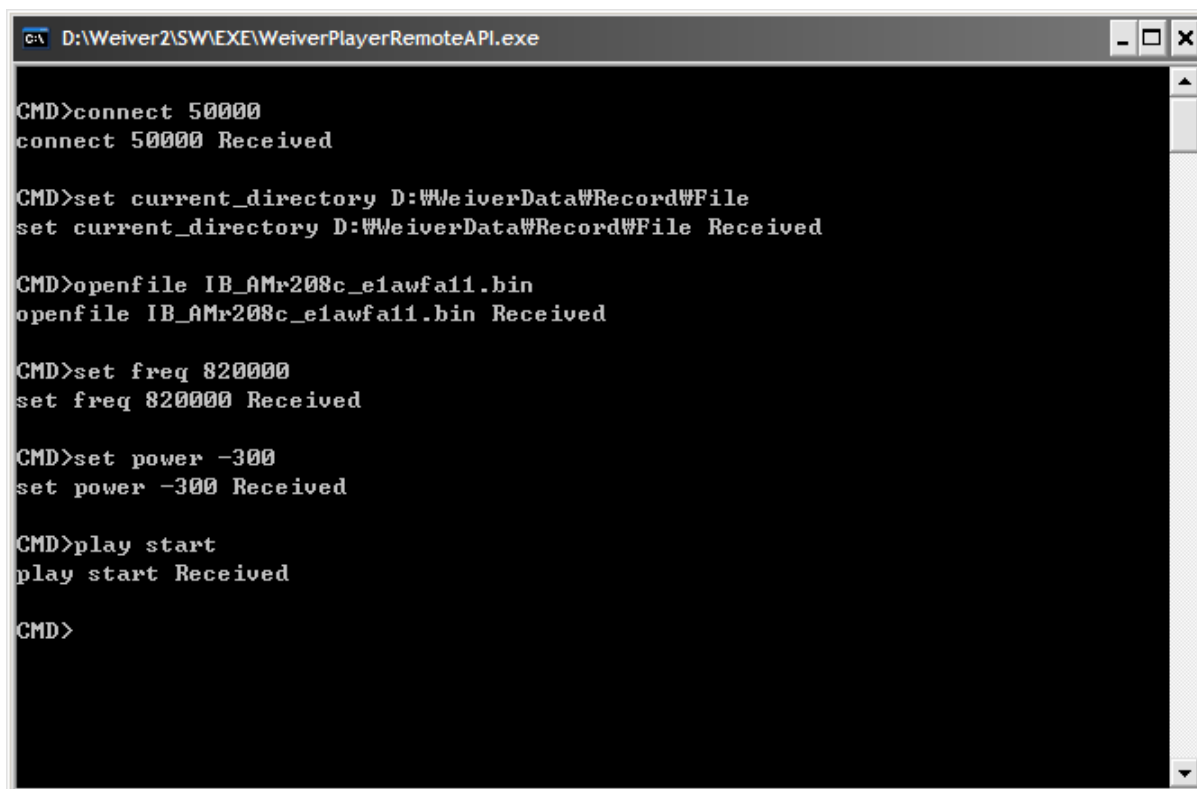

The screenshot shows a command prompt window titled "D:\Weiver2\SW\EXE\WeiverPlayerRemoteAPI.exe". The window contains the following text:

```
CMD>connect 50000
connect 50000 Received

CMD>set current_directory D:\WeiverData\Record\File
set current_directory D:\WeiverData\Record\File Received

CMD>openfile IB_AMr208c_e1awfa11.bin
openfile IB_AMr208c_e1awfa11.bin Received

CMD>set freq 820000
set freq 820000 Received

CMD>set power -300
set power -300 Received

CMD>play start
play start Received

CMD>
```

[Command examples]

'connect' and 'disconnect' command

- How to use

'connect port number' : Port number is the number of port where the response will be received after sending the packets.

'disconnect' : Terminate the connection

- Description

UDP port number must be notified when use 'connect' command to receive a proper response.


Designate UDP port number as same as the u2_RecvPortFromWeiverPlayer variable value for program examples. UDP port number is adjustable.

Receiving UDP port number of the device is fixed at 50504.

Disconnect command will stop device operation.

- Example

1. connect 50000,
2. disconnect

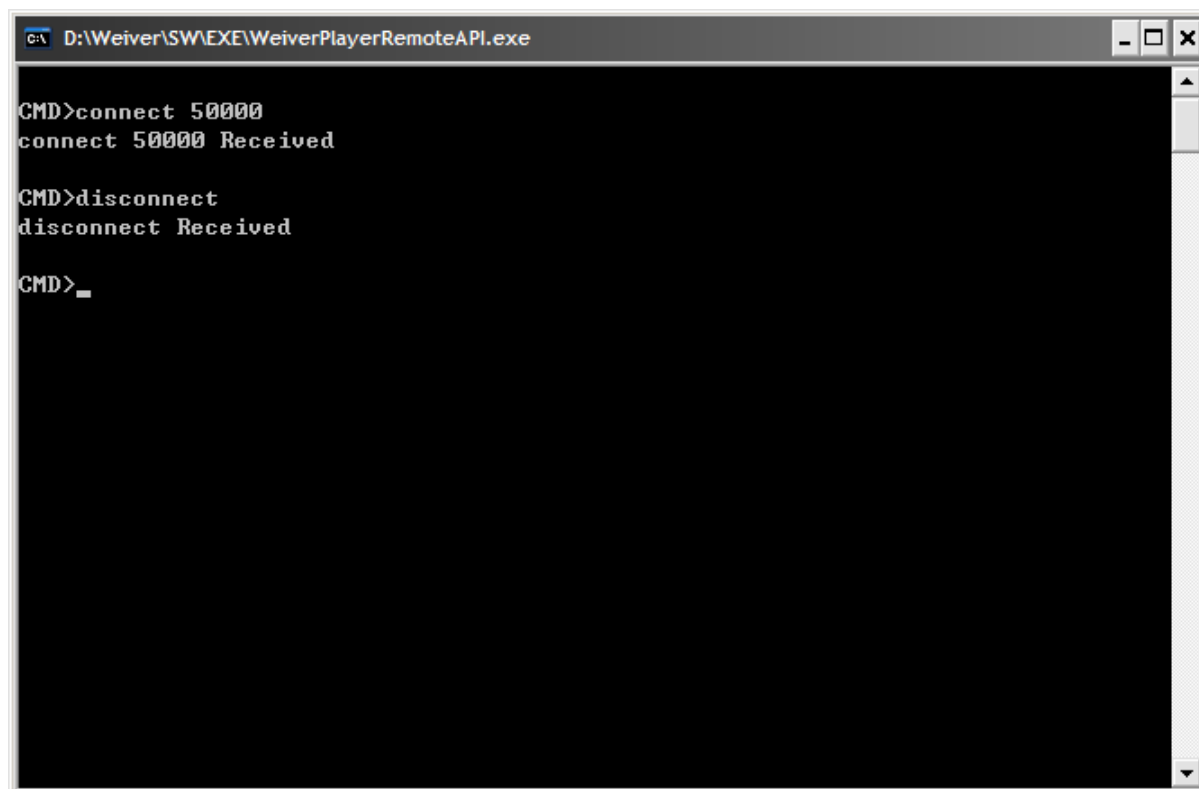

```
D:\Weiver\SW\EXE\WeiverPlayerRemoteAPI.exe
CMD>connect 50000
connect 50000 Received

CMD>disconnect
disconnect Received

CMD>_
```

'rescandisk' command

How to use)

'rescandisk' command will refresh device disk drive.


If e-SATA disk drive is not found, 'rescandisk' command may able device to find the disk drive.

Example)

Use when disk drive is not refreshing automatically.

Examples)

1. rescandisk

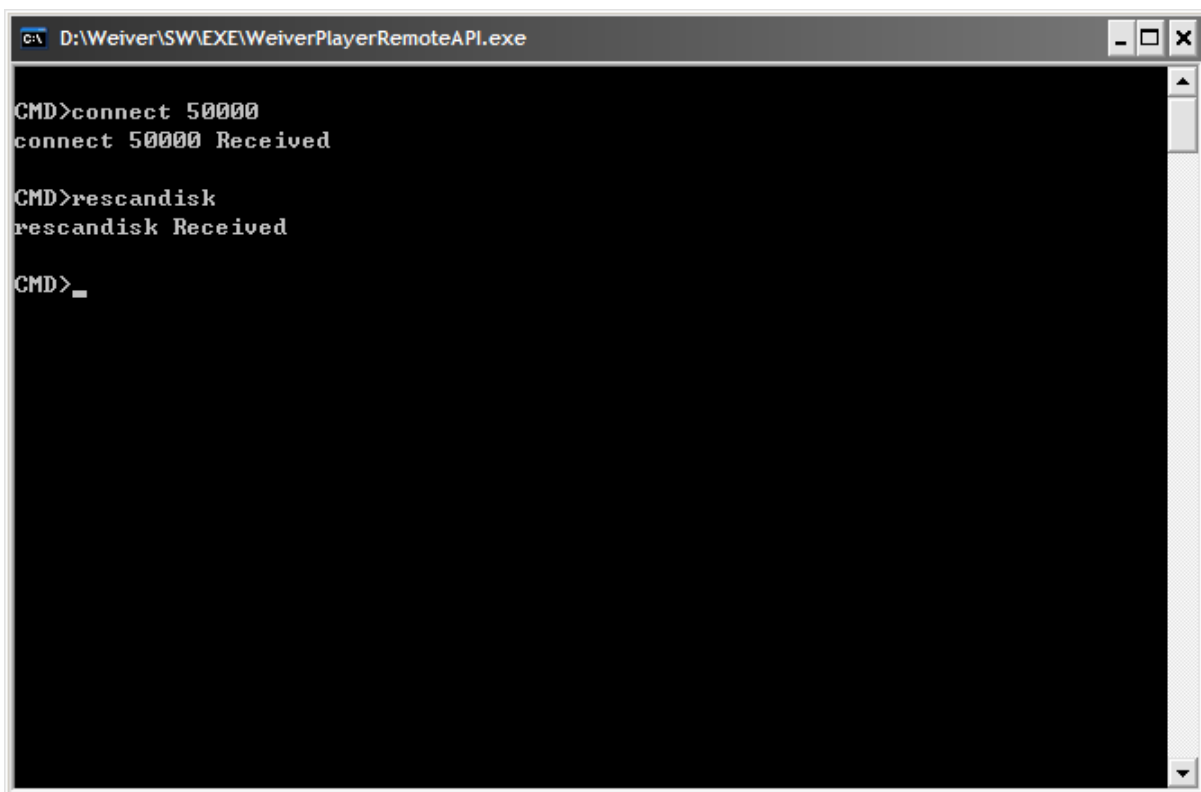

```
cmd.exe D:\Weiver\SW\EXE\WeiverPlayerRemoteAPI.exe
CMD>connect 50000
connect 50000 Received

CMD>rescandisk
rescandisk Received

CMD>_
```

'set current_directory', 'get current_directory' command
'get file_count', 'get filename', 'get folder_count', 'get foldername' command
'openfile', 'get openfile' command

How to use)

set current_directory : directory is the disk drive of the device.

get file_count : Bring number of files with .wpj file extension.

get filename index: The maximum number of Index is [number of files – 1].

get folder_count : set current_directory: Bring number of folders from directory.

get foldername index : The maximum number of Index is [number of folders – 1].

openfile filename : file name with .wpj extension.

Description)

Designate a xxx.wpj for play files.

Stop first before using 'openfile' command.

Example)

1. set current_directory f:\
2. get current_directory
3. get file_count
4. get filename 0
5. get filename 1
6. get folder_count
7. get foldername 0
8. get foldername 1
9. openfile testrecordtest.wpj
10. get openfile

```
C:\ D:\Weiver\SW\EXE\WeiverPlayerRemoteAPI.exe
CMD>connect 50000
connect 50000 Received

CMD>rescandisk
rescandisk Received

CMD>set current_directory f:\
set current_directory f:\ Received

CMD>get current_directory
get current_directory f:\

CMD>get file_count
get file_count 2

CMD>get filename 0
get filename 0 testrecordtest.wpj

CMD>get filename 1
get filename 1 Trigger.wpj

CMD>get folder_count
get folder_count 2

CMD>get foldername 0
get foldername 0 WeiverData

CMD>get foldername 1
get foldername 1 x86

CMD>openfile testrecordtest.wpj
openfile testrecordtest.wpj Received

CMD>get openfile
get openfile testrecordtest.wpj

CMD>_
```


'play start', 'play stop', 'play pause', 'play resume', 'get play_status' Command

How to use)

'play start', 'play stop', 'play pause', 'play resume', 'get play_status'

Description)

Use 'play start', 'play stop', 'play pause' and 'play resume' command after selecting the file with 'openfile' command.

'play start' starts the file Play.

'play stop' stops the file Play.


'play pause' pauses the file Play.

'play resume' resumes the file Play.

'get play_status' retrieves the current status.

Example)

1. play start
2. get play_status
2. play pause
3. play resume
4. play stop

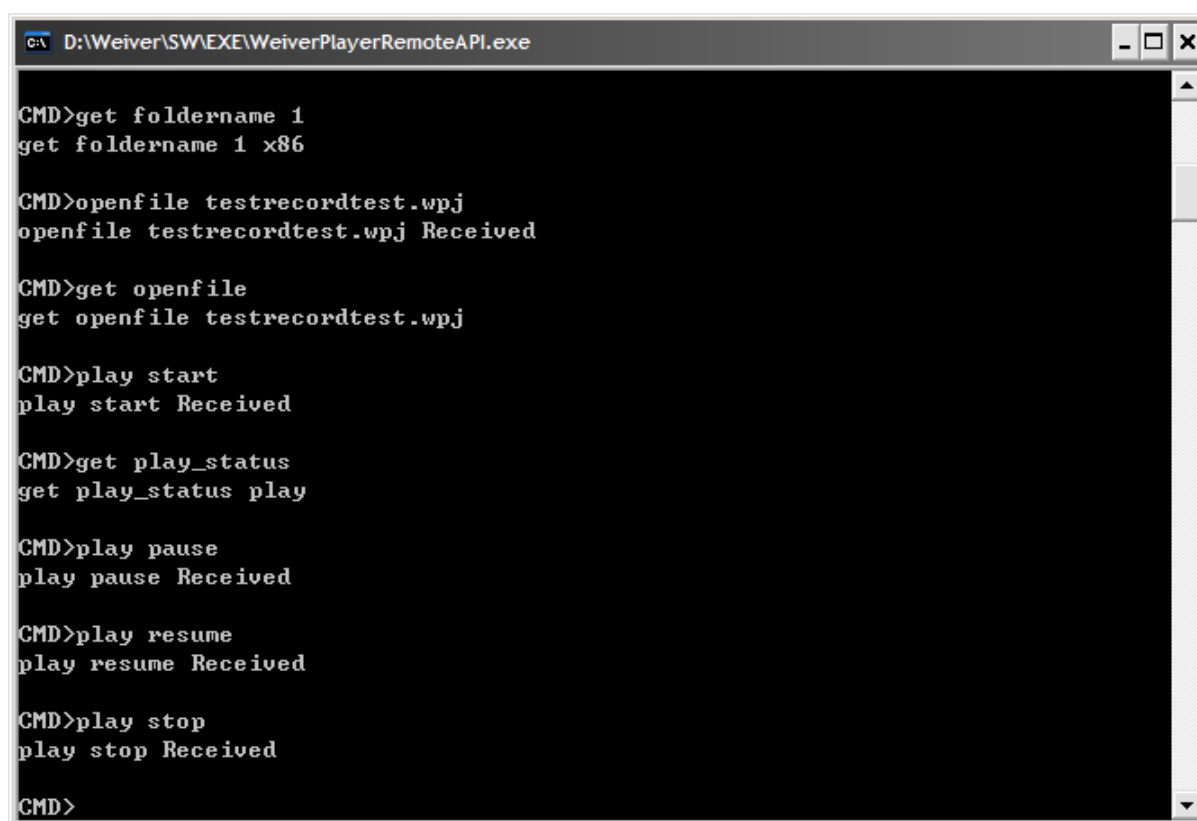

```
C:\ D:\Weiver\SW\EXE\WeiverPlayerRemoteAPI.exe
CMD>get foldername 1
get foldername 1 x86

CMD>openfile testrecordtest.wpj
openfile testrecordtest.wpj Received

CMD>get openfile
get openfile testrecordtest.wpj

CMD>play start
play start Received

CMD>get play_status
get play_status play

CMD>play pause
play pause Received

CMD>play resume
play resume Received

CMD>play stop
play stop Received

CMD>
```

set freq', 'get freq' Command

how to use)

'set freq' frequency

Weiver 1.0 : frequency range is from 50000000(50MHz) to 1000000000(1GHz).


Weiver 2.0 : Please refer to 'get freq_min', get 'freq_max' for frequency commands.

Description)

Select the file with 'openfile' commend and adjust frequency with 'set freq' command. The units are in Hz, KHz, and MHz.

Example)

1. set freq 400000000 (400MHz configuration)
2. get freq
3. set freq 400 MHz (400MHz configuration)
4. set freq 400000 KHz (400MHz configuration)
5. set freq 400000000 Hz (400MHz configuration)

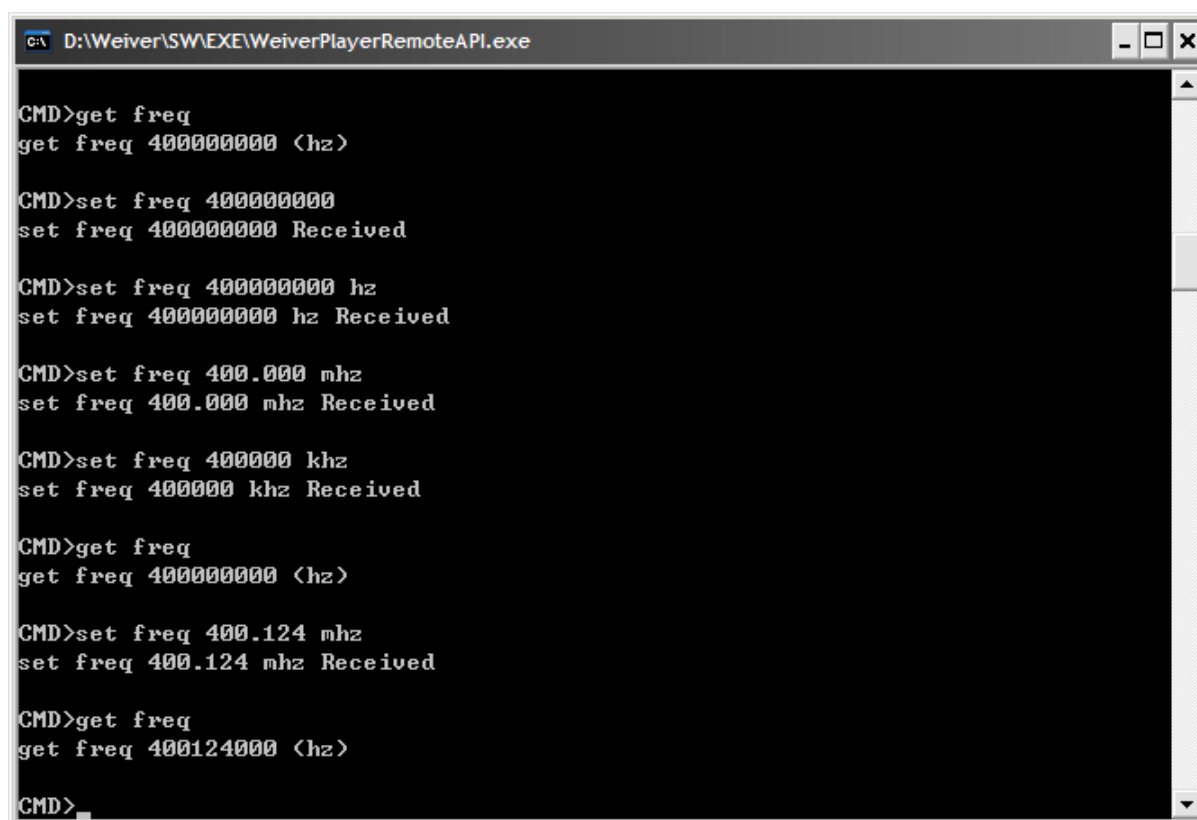

```
C:\ D:\Weiver\SW\EXE\WeiverPlayerRemoteAPI.exe
CMD>get freq
get freq 400000000 <hz>

CMD>set freq 400000000
set freq 400000000 Received

CMD>set freq 400000000 hz
set freq 400000000 hz Received

CMD>set freq 400.000 mhz
set freq 400.000 mhz Received

CMD>set freq 400000 khz
set freq 400000 khz Received

CMD>get freq
get freq 400000000 <hz>

CMD>set freq 400.124 mhz
set freq 400.124 mhz Received

CMD>get freq
get freq 400124000 <hz>

CMD>
```

'get gain_min', 'get gain_max', 'get rf_out_level 0', 'get gain', 'set gain' command.

How to use)

To apply more gain during Play after using 'openfile' command.

Generally, the range of Gain is from -30dB to +30dB. However, when the file has been selected, the range of the Gain can be checked with 'get gain_min' and 'get gain_max' command.

'get rf_out_level' time: the range of time is the total play time of the file.


Description)

Units in 0.1 dB.

For example, type in 'set gain 100' to apply +10dB Gain.

Example)

1. get gain_min
2. get gain_max
3. get rf_out_level 0
4. set gain 100
5. get rf_out_level 0
6. get gain

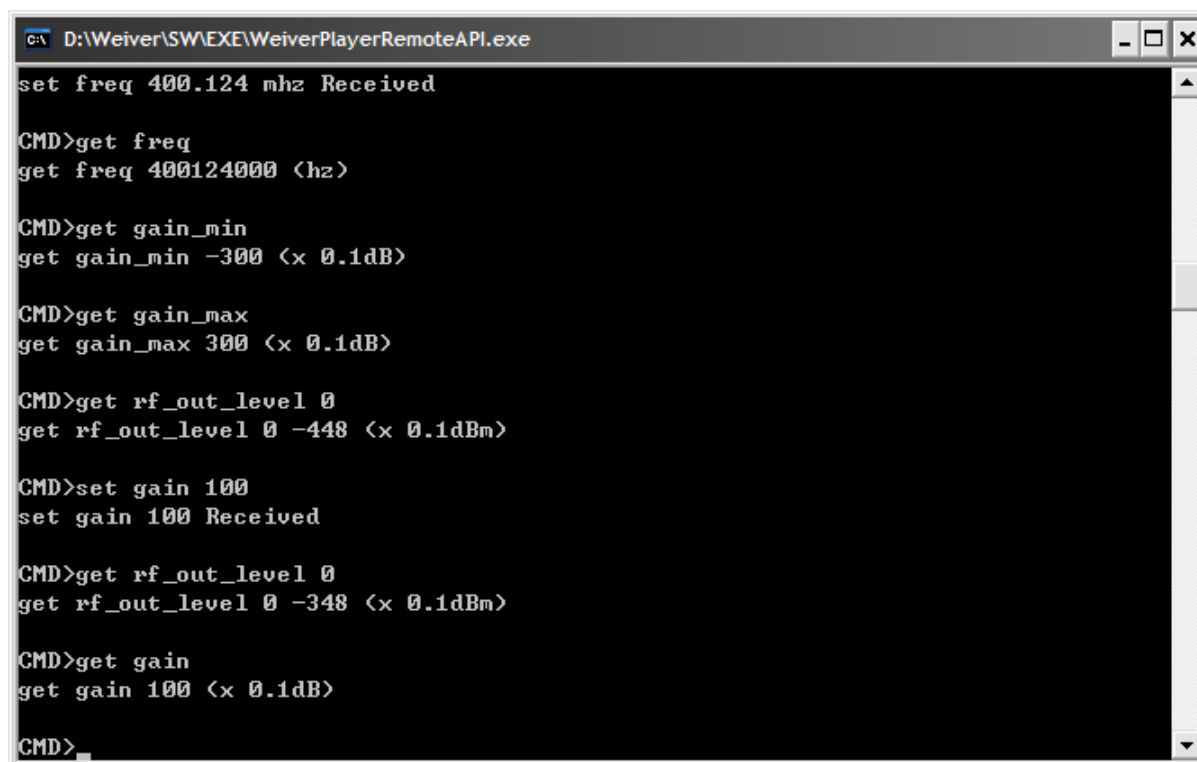

```
c:\ D:\Weiver\SW\EXE\WeiverPlayerRemoteAPI.exe
set freq 400.124 mhz Received

CMD>get freq
get freq 400124000 <hz>

CMD>get gain_min
get gain_min -300 <x 0.1dB>

CMD>get gain_max
get gain_max 300 <x 0.1dB>

CMD>get rf_out_level 0
get rf_out_level 0 -448 <x 0.1dBm>

CMD>set gain 100
set gain 100 Received

CMD>get rf_out_level 0
get rf_out_level 0 -348 <x 0.1dBm>

CMD>get gain
get gain 100 <x 0.1dB>

CMD>
```

'get play_time_total', 'get play_time_current', 'set play_time_current', 'get play_section' and 'set play_section' command

How to use)

'play time' related commands: allows designate the play starting points and obtain 'time' related information of the file after such file has been selected by using 'openfile' command.

'get play_time_total' command: displays the total play time of the selected file in seconds.

'set play_time_current' command: allows to configure starting and end point of the file for a continuous loop play. Time at starting point must be less than the ending point, and the time at the ending point must be less than the total play time of the file.

Description)

Units in seconds.


Possible playback time of the play file is 630 seconds.

'pp 5' moves the file play point to the 5 sec. location

'playrepeat' 6 10: Continuous loop play between 6 sec and 10 sec file location.

Example)

1. get play_time_total
2. get play_time_current
3. set play_time_current 5
4. set play_section 6 10
5. get play_section

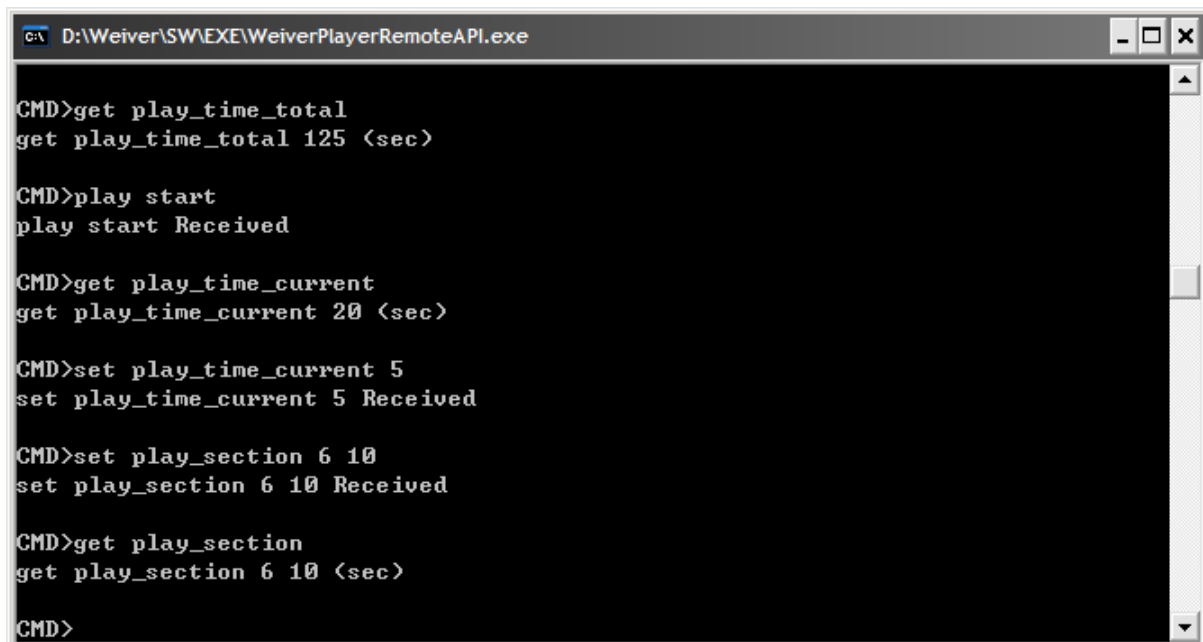

```
D:\Weiver\SW\EXE\WeiverPlayerRemoteAPI.exe

CMD>get play_time_total
get play_time_total 125 <sec>

CMD>play start
play start Received

CMD>get play_time_current
get play_time_current 20 <sec>

CMD>set play_time_current 5
set play_time_current 5 Received

CMD>set play_section 6 10
set play_section 6 10 Received

CMD>get play_section
get play_section 6 10 <sec>

CMD>
```

'set spec_inv off/on' and 'get spec_inv' command

How to use)

'set spec_inv off': Transmitting the original RF spectrum of the play file.

'set spec_inv on' :Transmitting the inverted RF spectrum of the play file


Description)

Use 'set spec_inv' command to transmit inverted spectrum

Example)

1. set spec_inv off

2. set spec_inv on

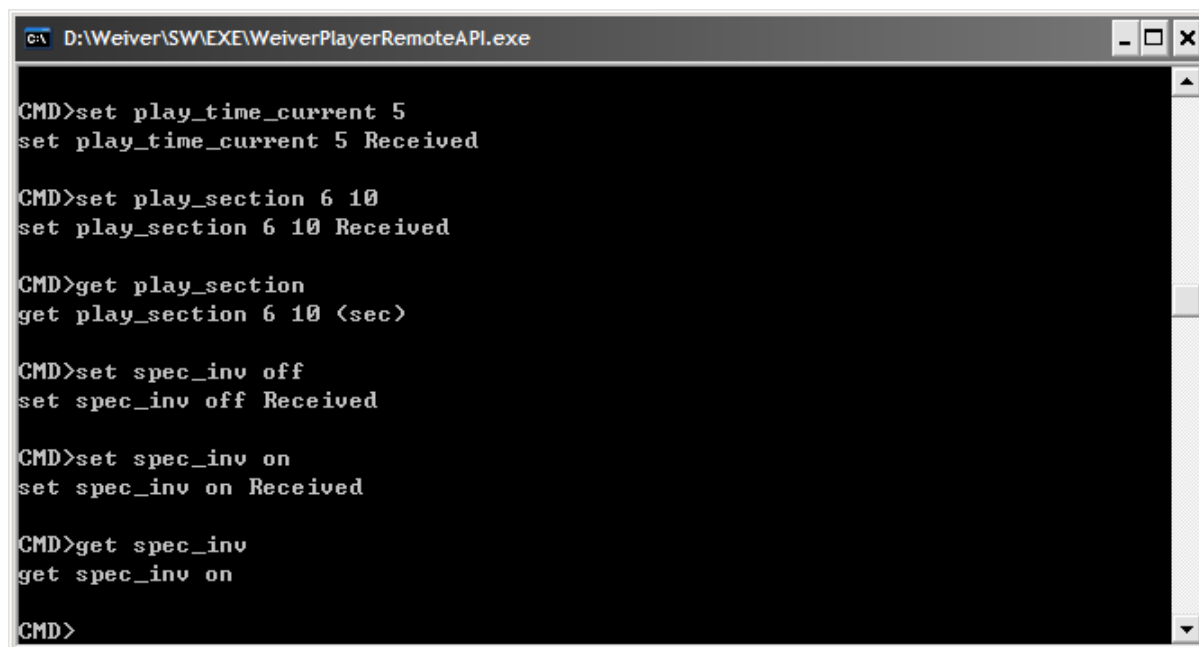

```
c:\ D:\Weiver\SW\EXE\WeiverPlayerRemoteAPI.exe

CMD>set play_time_current 5
set play_time_current 5 Received

CMD>set play_section 6 10
set play_section 6 10 Received

CMD>get play_section
get play_section 6 10 <sec>

CMD>set spec_inv off
set spec_inv off Received

CMD>set spec_inv on
set spec_inv on Received

CMD>get spec_inv
get spec_inv on

CMD>
```

'set sample_rate' and 'get sample_rate' Command

How to use)

'set sample_rate' sample frequency

Weiver 1.0 : Sample frequency range 5000000(5MHz) ~ 30000000(30MHz)

Weiver 2.0: Sample frequency range 1250000(1.25MHz) ~ 70000000(70MHz)

Sample frequency means the I/Q Rate. I/Q rate for BW 8MHz is 10MHz when BW 24MHz is 30MHz.

Description)


Sample frequency will be selected automatically when file has been selected by 'openfile' command

Use 'set sample_rate' to manually adjust the rate.

Units in Hz.

Example)

1. set sample_rate 12000000, set sample_rate 12 mhz, set sample_rate 12000 khz
2. get sample_rate

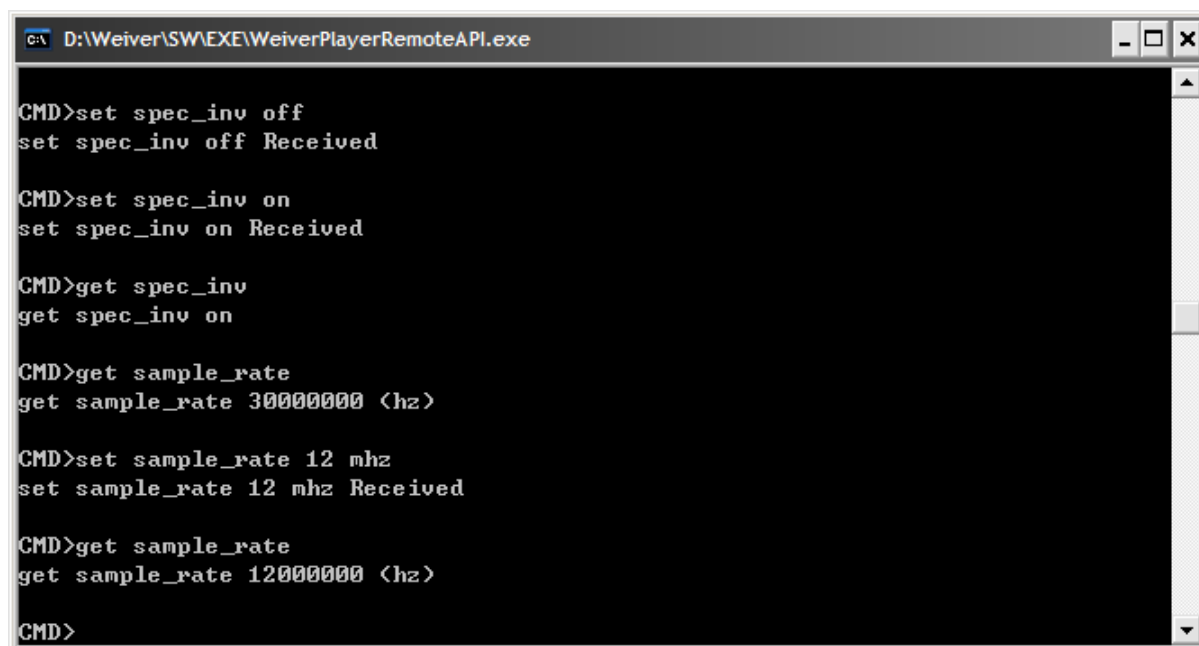

```
C:\D:\Weiver\SW\EXE>WeiverPlayerRemoteAPI.exe

CMD>set spec_inv off
set spec_inv off Received

CMD>set spec_inv on
set spec_inv on Received

CMD>get spec_inv
get spec_inv on

CMD>get sample_rate
get sample_rate 30000000 <hz>

CMD>set sample_rate 12 mhz
set sample_rate 12 mhz Received

CMD>get sample_rate
get sample_rate 12000000 <hz>

CMD>
```

'set trigger_out_level' and 'get trigger_out_level' Command.

How to use)

WeiverPlayer 1.0, Weiver 2.0 and WeiverPlayer 2.0 have Trigger out port.

'set trigger_out_level low': Transmitting LOW level(0V) via Trigger Out port.


'set trigger_out_level high': Transmitting HIGH level(3.3V) via Trigger Out port.

Description)

Configure output level of 'Trigger Out' port.

Example)

1. set trigger_out_level low
2. set trigger_out_level high

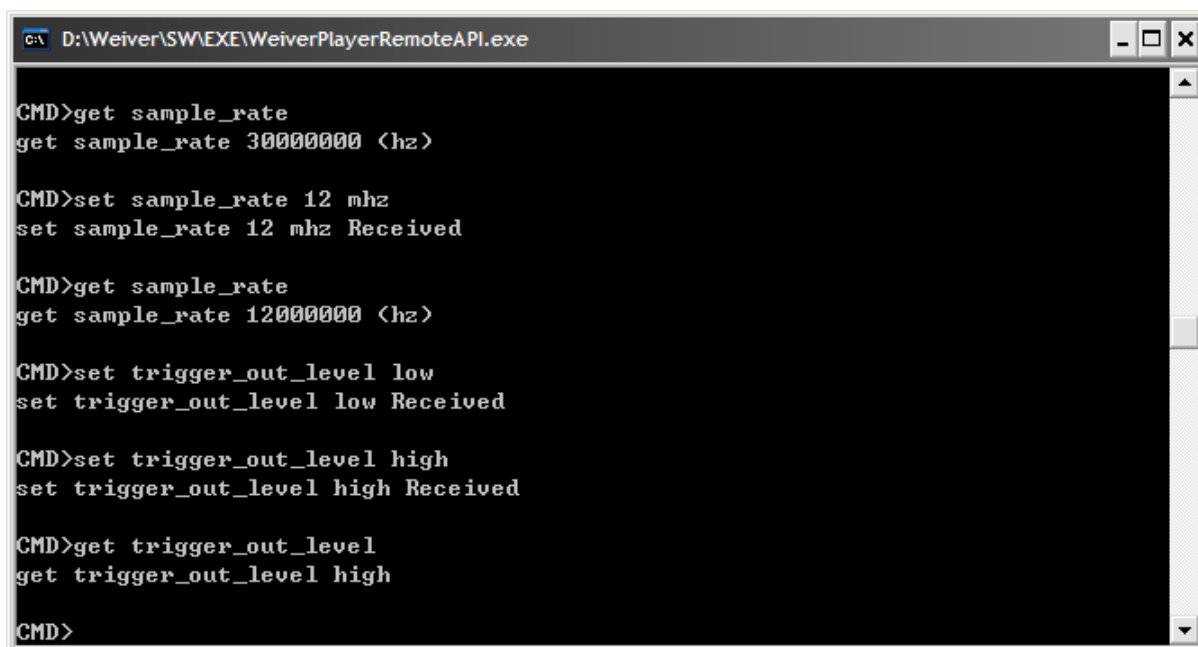

```
c:\ D:\Weiver\SW\EXE\WeiverPlayerRemoteAPI.exe
CMD>get sample_rate
get sample_rate 30000000 <hz>

CMD>set sample_rate 12 mhz
set sample_rate 12 mhz Received

CMD>get sample_rate
get sample_rate 12000000 <hz>

CMD>set trigger_out_level low
set trigger_out_level low Received

CMD>set trigger_out_level high
set trigger_out_level high Received

CMD>get trigger_out_level
get trigger_out_level high

CMD>
```

'set extclk' and 'get extclk' Command

How to use)

It can synchronized external 10MHz with device operating clock

'set extclk off': Use internal 10MHz clock.

'set extclk on': Sync with external 10MHz clock input

Description)

Generally use 'set extclk off'.

Example)

1. set extclk off
2. set extclk on
3. get extclk

'set trigger_in' and 'get trigger_in' command

How to use)

'set trigger_in off': RF transmission regardless of its input level of 'trigger In' port.


'set trigger_in on': RF transmitting, only if the input level is HIGH(3.3V)

Description)

When 'set trigger_in' command was used for play start, the file play is based on the input level of 'trigger In' port. It enables the synchronized operation of multiple Weivers.

Example)

1. set trigger_in off
2. set trigger_in on
3. get trigger_in

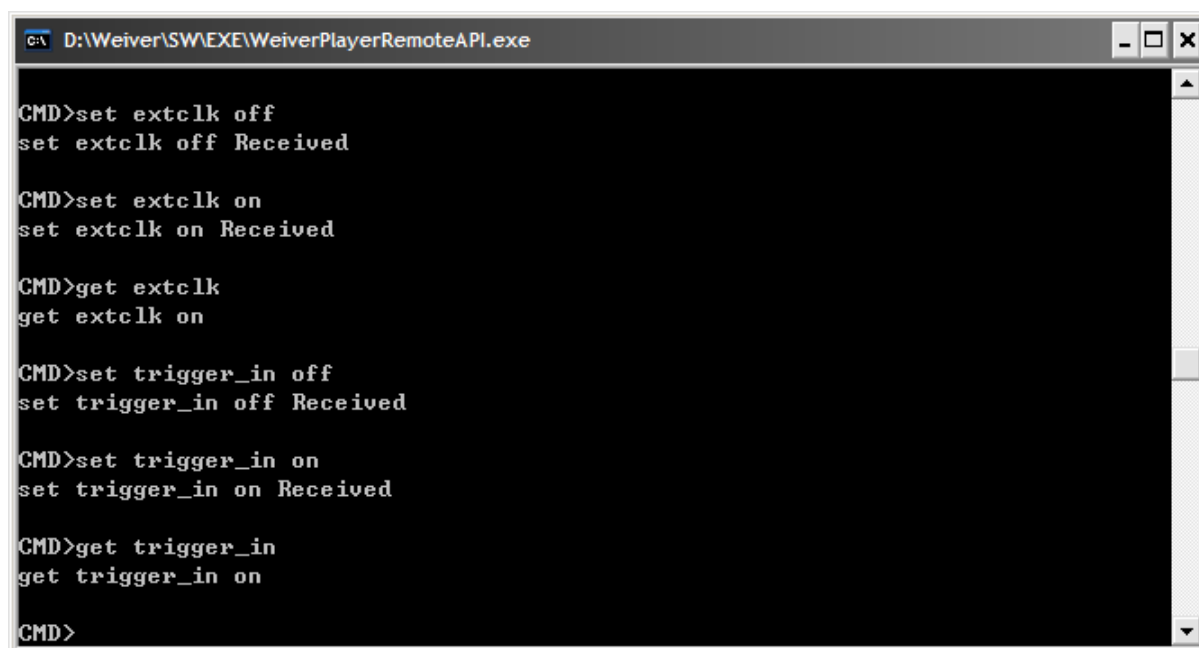

```
C:\D:\Weiver\SW\EXE>WeiverPlayerRemoteAPI.exe
CMD>set extclk off
set extclk off Received

CMD>set extclk on
set extclk on Received

CMD>get extclk
get extclk on

CMD>set trigger_in off
set trigger_in off Received

CMD>set trigger_in on
set trigger_in on Received

CMD>get trigger_in
get trigger_in on

CMD>
```

[WeiverPlayerRemoteAPI Source]

```
CWinApp theApp;
using namespace std;
const unsigned short u2_WeiverPlayerPort = WEIVER_PLAYER_API_RX_PORT;
const unsigned short u2_RecvPortFromWeiverPlayer = 50000;
const char s1a_WeiverPlayerIP[] = "192.168.100.1";
//const char s1a_WeiverPlayerIP[] = "127.0.0.1";
//const char s1a_WeiverPlayerIP[] = "192.168.10.15";

int _tmain(int argc, TCHAR* argv[], TCHAR* envp[])
{
    int nRetCode = 0;

    if (!AfxWinInit(::GetModuleHandle(NULL), NULL, ::GetCommandLine(), 0))
    {
        _tprintf(_T("AfxWinInit failed.\n"));
        nRetCode = 1;
    }
    else
    {
        wchar_t wCmdLine[1000];
        wchar_t wSendCmd[1000];

        WSADATA wsaData;
        WSStartup(MAKEWORD(2,2), &wsaData);

        while(nRetCode == 0)
        {
            memset(wCmdLine, 0, 1000);
            memset(wSendCmd, 0, 1000);

            wprintf(_T("\nCMD>"));

            _getws_s(wCmdLine, 1000);

            if(wcsncmp(wCmdLine, _T("exit"), wcslen(_T("exit"))))
            {
                nRetCode = 1;
            }
        }
    }
}
```

```
        else
        {
            SendToStringCMD((char*)wCmdLine, 2*wcslen(wCmdLine));
        }
        wprintf(_T("\n"));
    }
    WSACleanup();
}

return nRetCode;
}

void SendToStringCMD(char *s1p_Data, unsigned int u4_Size)
{
    SOCKET h_Socket;
    SOCKADDR_IN Addr;

    int SentBytes;

    WvPlayerRemotePacket_t t_Packet;
    WvPlayerRemotePacket_tp tp_Packet;

    char *pSendData = (char *)&t_Packet;

    char message[2000];
    memset(message, 0, 2000);

    int clntAddrSize = sizeof(Addr);

    h_Socket = socket(PF_INET, SOCK_DGRAM, IPPROTO_UDP);

    memset(&Addr, 0, sizeof(Addr));
    Addr.sin_family = AF_INET;
    Addr.sin_port = htons(u2_RecvPortFromWeiverPlayer);
    Addr.sin_addr.s_addr = htonl(INADDR_ANY);

    struct timeval timeout;
    timeout.tv_sec = 2;//2 seconds
    timeout.tv_usec = 0;
    int optlen = sizeof(timeout);
```

```
setsockopt(h_Socket, SOL_SOCKET, SO_RCVTIMEO, (const char *)&timeout, optlen);
if(bind(h_Socket, (SOCKADDR*)&Addr, sizeof(Addr)) == SOCKET_ERROR)
{
    wprintf(_T("bind() Error"));
    closesocket(h_Socket);
    return;
}

t_Packet.u4_ID = WEIVER_PLAYER_ID;
t_Packet.u4_Reserved = WV_PLAYER_REMOTE_CMD_SET_STRING;
t_Packet.u4_DataSize = u4_Size;

memset(t_Packet.u1a_Data, 0, 1000);
memcpy(t_Packet.u1a_Data, s1p_Data, u4_Size);

memset(&Addr, 0, sizeof(Addr));
Addr.sin_family = AF_INET;
Addr.sin_port = htons(u2_WeiverPlayerPort);
Addr.sin_addr.s_addr = inet_addr(s1a_WeiverPlayerIP);

SentBytes = sendto(h_Socket
                    ,pSendData
                    ,4/*sizeof(t_Packet.u4_ID)*/
                    + 4/*sizeof(t_Packet.u4_Reserved)*/
                    + 4/*sizeof(t_Packet.u4_DataSize)*/ + u4_Size
                    ,0, (SOCKADDR*)&Addr, sizeof(SOCKADDR_IN));

if(SentBytes == SOCKET_ERROR)
{
    wprintf(_T("\nSend Fail"));
}
```

```
else
{
    memset(&Addr, 0, sizeof(Addr));

    int length = recvfrom(h_Socket
        , message, 2000, 0, (SOCKADDR*)&Addr, &clntAddrSize);

    if(length == -1)
    {
        wprintf(_T("Time Out"));
    }
    else
    {
        tp_Packet = (WvPlayerRemotePacket_tp)(message);

        wprintf(_T("%s"), tp_Packet->u1a_Data);
    }
}

closesocket(h_Socket);
}
```